


CLIXX SLIM FOLD20 LINE



DIMENSIONS



 **ENERG**

Lightinova
CLIXX SLIM FOLD20 2700K

A
B
C
D
E
F
G

16
kWh/1000h

 2019/2015


EAN	6150714135193
SKU	CS.2712021.0349
Energy rating	G
Collection	CLIXX SLIM
Colour	Black
IP rating	IP20
Light source	LED
Power	16 W
Lumen	985 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	61.6 Lm/W
Lifetime	>50.000h
Beam angle	Diffuse
Driver	-
Voltage	24 V
Input voltage	110-240 V
Dim	Triac
Package dimensions	240 x 160 x 55 mm
Product dimensions	22.5 x 196 x 120 mm
Package weight	580 g
HS code	94054990
ETL code	5028942
Material	Aluminium
Warranty	2 years



CLIXX SLIM FOLD20 LINE



DIMENSIONS



 **ENERG**

Lightinova
CLIXX SLIM FOLD20 2700K

A
B
C
D
E
F
G

16
kWh/1000h

 2019/2015



EAN	6150714137128
SKU	CS.2722021.0351
Energy rating	G
Collection	CLIXX SLIM
Colour	Black
IP rating	IP20
Light source	LED
Power	16 W
Lumen	985 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	61.6 Lm/W
Lifetime	>50.000h
Beam angle	Diffuse
Driver	-
Voltage	24 V
Input voltage	110-240 V
Dim	Dali
Package dimensions	240 x 160 x 55 mm
Product dimensions	22.5 x 196 x 120 mm
Package weight	580 g
HS code	94054990
ETL code	5028942
Material	Aluminium
Warranty	2 years



CLIXX SLIM FOLD20 LINE



DIMENSIONS

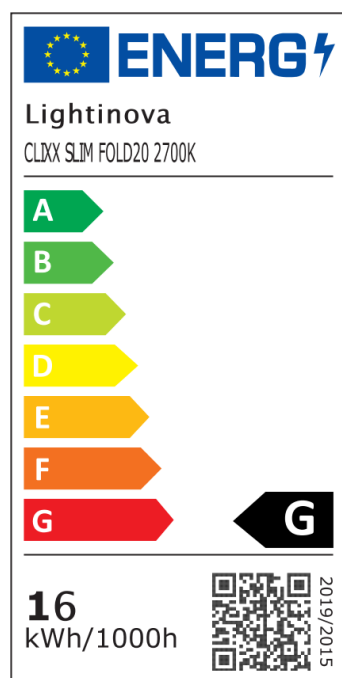


EAN	6150714137180
SKU	CS.2752021.0353
Energy rating	G
Collection	CLIXX SLIM
Colour	Black
IP rating	IP20
Light source	LED
Power	16 W
Lumen	985 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	61.6 Lm/W
Lifetime	>50.000h
Beam angle	Diffuse
Driver	-
Voltage	24 V
Input voltage	110-240 V
Dim	Zigbee
Package dimensions	240 x 160 x 55 mm
Product dimensions	22.5 x 196 x 120 mm
Package weight	580 g
HS code	94054990
ETL code	5028942
Material	Aluminium
Warranty	2 years



CLIXX SLIM FOLD20 LINE



DIMENSIONS



 **ENERG**

Lightinova
CLIXX SLIM FOLD20 3000K

A
B
C
D
E
F
G

16
kWh/1000h

 2019/2015



EAN	9503891964396
SKU	CS.3012021.0348
Energy rating	G
Collection	CLIXX SLIM
Colour	Black
IP rating	IP20
Light source	LED
Power	16 W
Lumen	985 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	61.6 Lm/W
Lifetime	>50.000h
Beam angle	Diffuse
Driver	-
Voltage	24 V
Input voltage	110-240 V
Dim	Triac
Package dimensions	240 x 160 x 55 mm
Product dimensions	22.5 x 196 x 120 mm
Package weight	580 g
HS code	94054990
ETL code	5028942
Material	Aluminium
Warranty	2 years



CLIXX SLIM FOLD20 LINE



DIMENSIONS

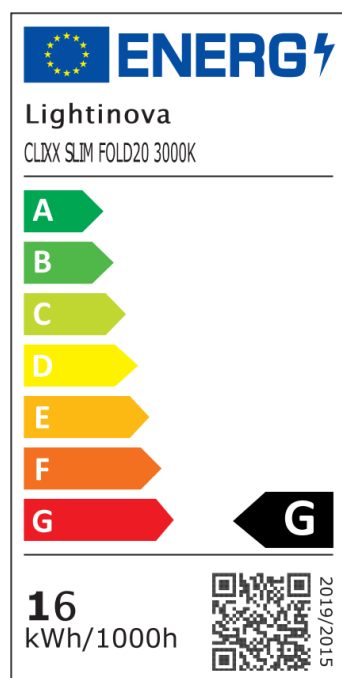



EAN	9504591447370
SKU	CS.3022021.0350
Energy rating	G
Collection	CLIXX SLIM
Colour	Black
IP rating	IP20
Light source	LED
Power	16 W
Lumen	985 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	61.6 Lm/W
Lifetime	>50.000h
Beam angle	Diffuse
Driver	-
Voltage	24 V
Input voltage	110-240 V
Dim	Dali
Package dimensions	240 x 160 x 55 mm
Product dimensions	22.5 x 196 x 120 mm
Package weight	580 g
HS code	94054990
ETL code	5028942
Material	Aluminium
Warranty	2 years



CLIXX SLIM FOLD20 LINE



DIMENSIONS

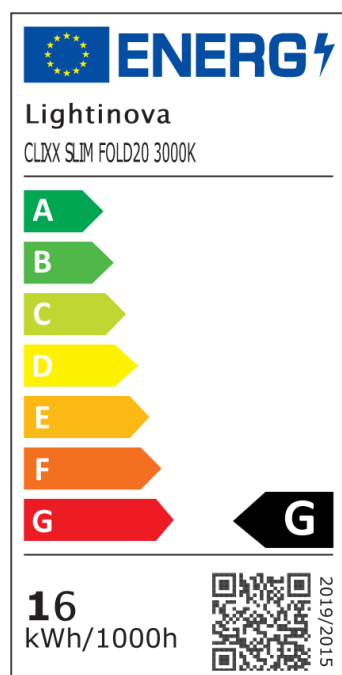


EAN	9501929729733
SKU	CS.3052021.0352
Energy rating	G
Collection	CLIXX SLIM
Colour	Black
IP rating	IP20
Light source	LED
Power	16 W
Lumen	985 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	61.6 Lm/W
Lifetime	>50.000h
Beam angle	Diffuse
Driver	-
Voltage	24 V
Input voltage	110-240 V
Dim	Zigbee
Package dimensions	240 x 160 x 55 mm
Product dimensions	22.5 x 196 x 120 mm
Package weight	580 g
HS code	94054990
ETL code	5028942
Material	Aluminium
Warranty	2 years



CLIXX SLIM FOLD20 LINE



DIMENSIONS



 **ENERG**

Lightinova
CLIXX SLIM FOLD20 2700K

A
B
C
D
E
F
G

16
kWh/1000h

 2019/2015



EAN	6150714146137
SKU	CS.2712021.0355
Energy rating	G
Collection	CLIXX SLIM
Colour	White
IP rating	IP20
Light source	LED
Power	16 W
Lumen	985 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	61.6 Lm/W
Lifetime	>50.000h
Beam angle	Diffuse
Driver	-
Voltage	24 V
Input voltage	110-240 V
Dim	Triac
Package dimensions	240 x 160 x 55 mm
Product dimensions	22.5 x 196 x 120 mm
Package weight	580 g
HS code	94054990
ETL code	5028942
Material	Aluminium
Warranty	2 years



CLIXX SLIM FOLD20 LINE



DIMENSIONS

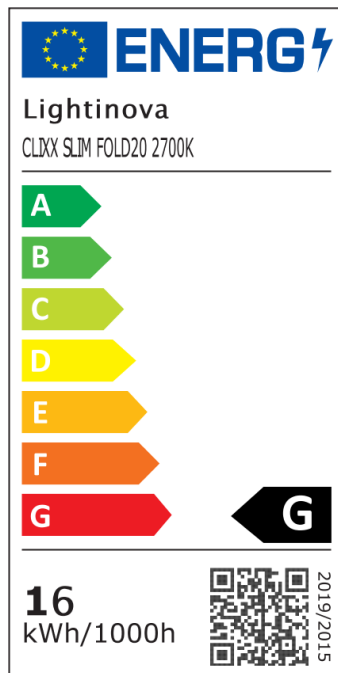



EAN	6150714152114
SKU	CS.2722021.0357
Energy rating	G
Collection	CLIXX SLIM
Colour	White
IP rating	IP20
Light source	LED
Power	16 W
Lumen	985 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	61.6 Lm/W
Lifetime	>50.000h
Beam angle	Diffuse
Driver	-
Voltage	24 V
Input voltage	110-240 V
Dim	Dali
Package dimensions	240 x 160 x 55 mm
Product dimensions	22.5 x 196 x 120 mm
Package weight	580 g
HS code	94054990
ETL code	5028942
Material	Aluminium
Warranty	2 years



CLIXX SLIM FOLD20 LINE



DIMENSIONS

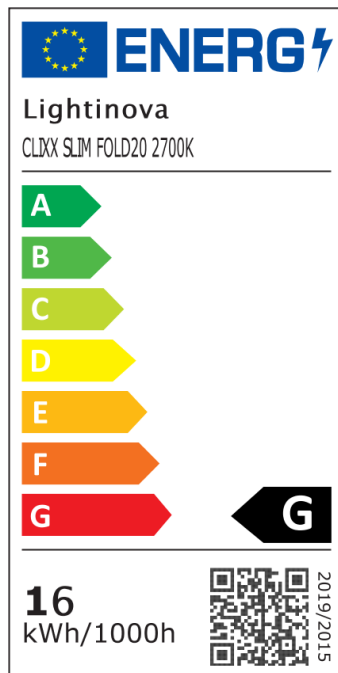



EAN	6150714159137
SKU	CS.2752021.0359
Energy rating	G
Collection	CLIXX SLIM
Colour	White
IP rating	IP20
Light source	LED
Power	16 W
Lumen	985 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	61.6 Lm/W
Lifetime	>50.000h
Beam angle	Diffuse
Driver	-
Voltage	24 V
Input voltage	110-240 V
Dim	Zigbee
Package dimensions	240 x 160 x 55 mm
Product dimensions	22.5 x 196 x 120 mm
Package weight	580 g
HS code	94054990
ETL code	5028942
Material	Aluminium
Warranty	2 years



CLIXX SLIM FOLD20 LINE



DIMENSIONS

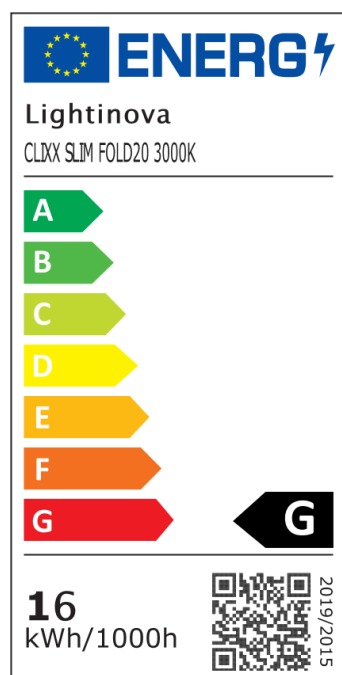



EAN	9505372397495
SKU	CS.3012021.0354
Energy rating	G
Collection	CLIXX SLIM
Colour	White
IP rating	IP20
Light source	LED
Power	16 W
Lumen	985 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	61.6 Lm/W
Lifetime	>50.000h
Beam angle	Diffuse
Driver	-
Voltage	24 V
Input voltage	110-240 V
Dim	Triac
Package dimensions	240 x 160 x 55 mm
Product dimensions	22.5 x 196 x 120 mm
Package weight	580 g
HS code	94054990
ETL code	5028942
Material	Aluminium
Warranty	2 years



CLIXX SLIM FOLD20 LINE



DIMENSIONS

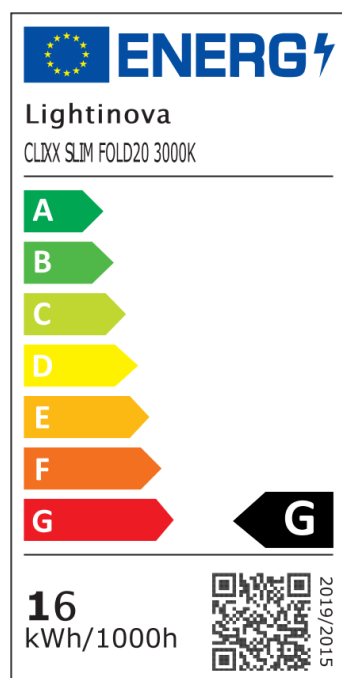



EAN	9506577798759
SKU	CS.3022021.0356
Energy rating	G
Collection	CLIXX SLIM
Colour	White
IP rating	IP20
Light source	LED
Power	16 W
Lumen	985 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	61.6 Lm/W
Lifetime	>50.000h
Beam angle	Diffuse
Driver	-
Voltage	24 V
Input voltage	110-240 V
Dim	Dali
Package dimensions	240 x 160 x 55 mm
Product dimensions	22.5 x 196 x 120 mm
Package weight	580 g
HS code	94054990
ETL code	5028942
Material	Aluminium
Warranty	2 years



CLIXX SLIM FOLD20 LINE



DIMENSIONS

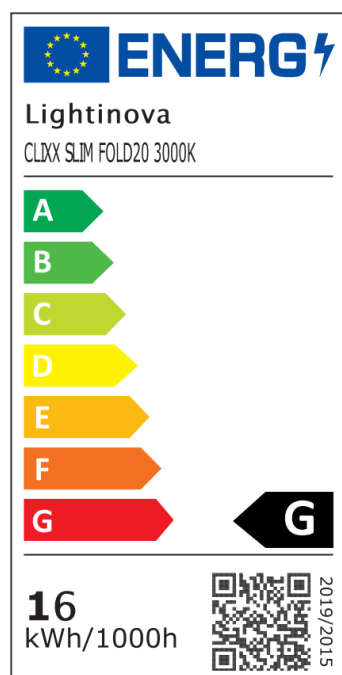

EAN	9509742826172
SKU	CS.3052021.0358
Energy rating	G
Collection	CLIXX SLIM
Colour	White
IP rating	IP20
Light source	LED
Power	16 W
Lumen	985 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	61.6 Lm/W
Lifetime	>50.000h
Beam angle	Diffuse
Driver	-
Voltage	24 V
Input voltage	110-240 V
Dim	Zigbee
Package dimensions	240 x 160 x 55 mm
Product dimensions	22.5 x 196 x 120 mm
Package weight	580 g
HS code	94054990
ETL code	5028942
Material	Aluminium
Warranty	2 years

