


CLIXX SLIM LINE80



DIMENSIONS



 **ENERG**

Lightinova
CLIXX SLIM LINE80 2700K

A
B
C
D
E
F
G

30
kWh/1000h

 2019/2015


EAN	6150714021014
SKU	CS.2712021.0305
Energy rating	G
Collection	CLIXX SLIM
Colour	Black
IP rating	IP20
Light source	LED
Power	30 W
Lumen	1970 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	65.7 Lm/W
Lifetime	>50.000h
Beam angle	Diffuse
Driver	-
Voltage	24 V
Input voltage	110-240 V
Dim	Triac
Package dimensions	844 x 83 x 51 mm
Product dimensions	22.5 x 800 x 40 mm
Package weight	920 g
HS code	94054990
ETL code	5028942
Material	Aluminium
Warranty	2 years



CLIXX SLIM LINE80



DIMENSIONS



 **ENERG**

Lightinova
CLIXX SLIM LINE80 2700K

A
B
C
D
E
F
G

30
kWh/1000h

 2019/2015



EAN	6150714023049
SKU	CS.2722021.0307
Energy rating	G
Collection	CLIXX SLIM
Colour	Black
IP rating	IP20
Light source	LED
Power	30 W
Lumen	1970 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	65.7 Lm/W
Lifetime	>50.000h
Beam angle	Diffuse
Driver	-
Voltage	24 V
Input voltage	110-240 V
Dim	Dali
Package dimensions	844 x 83 x 51 mm
Product dimensions	22.5 x 800 x 40 mm
Package weight	920 g
HS code	94054990
ETL code	5028942
Material	Aluminium
Warranty	2 years



CLIXX SLIM LINE80



DIMENSIONS

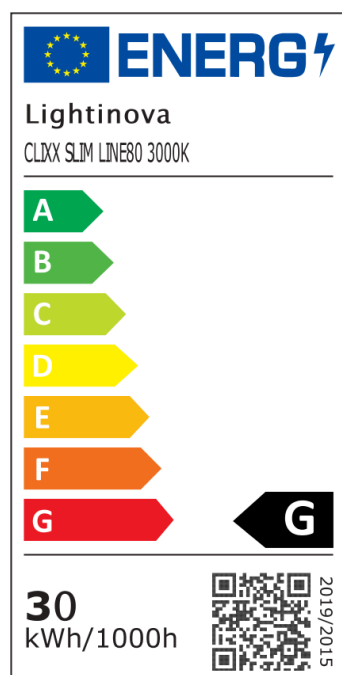


EAN	9505244972232
SKU	CS.3012021.0304
Energy rating	G
Collection	CLIXX SLIM
Colour	Black
IP rating	IP20
Light source	LED
Power	30 W
Lumen	1970 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	65.7 Lm/W
Lifetime	>50.000h
Beam angle	Diffuse
Driver	-
Voltage	24 V
Input voltage	110-240 V
Dim	Triac
Package dimensions	844 x 83 x 51 mm
Product dimensions	22.5 x 800 x 40 mm
Package weight	920 g
HS code	94054990
ETL code	5028942
Material	Aluminium
Warranty	2 years



CLIXX SLIM LINE80



DIMENSIONS



 **ENERG**

Lightinova
CLIXX SLIM LINE80 3000K

A
B
C
D
E
F
G

30
kWh/1000h

 2019/2015



EAN	9505936624654
SKU	CS.3022021.0306
Energy rating	G
Collection	CLIXX SLIM
Colour	Black
IP rating	IP20
Light source	LED
Power	30 W
Lumen	1970 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	65.7 Lm/W
Lifetime	>50.000h
Beam angle	Diffuse
Driver	-
Voltage	24 V
Input voltage	110-240 V
Dim	Dali
Package dimensions	844 x 83 x 51 mm
Product dimensions	22.5 x 800 x 40 mm
Package weight	920 g
HS code	94054990
ETL code	5028942
Material	Aluminium
Warranty	2 years



CLIXX SLIM LINE80



DIMENSIONS

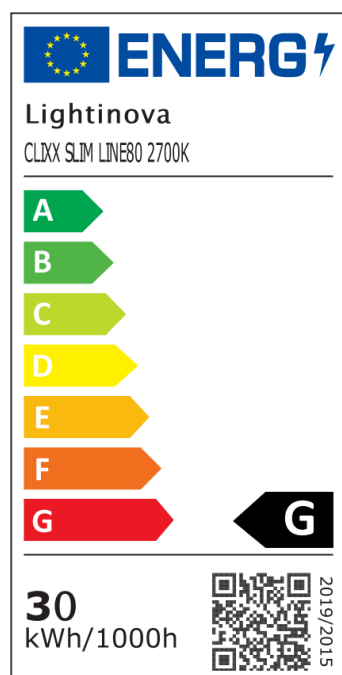



EAN	6150714031013
SKU	CS.2712021.0309
Energy rating	G
Collection	CLIXX SLIM
Colour	White
IP rating	IP20
Light source	LED
Power	30 W
Lumen	1970 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	65.7 Lm/W
Lifetime	>50.000h
Beam angle	Diffuse
Driver	-
Voltage	24 V
Input voltage	110-240 V
Dim	Triac
Package dimensions	844 x 83 x 51 mm
Product dimensions	22.5 x 800 x 40 mm
Package weight	920 g
HS code	94054990
ETL code	5028942
Material	Aluminium
Warranty	2 years



CLIXX SLIM LINE80



DIMENSIONS

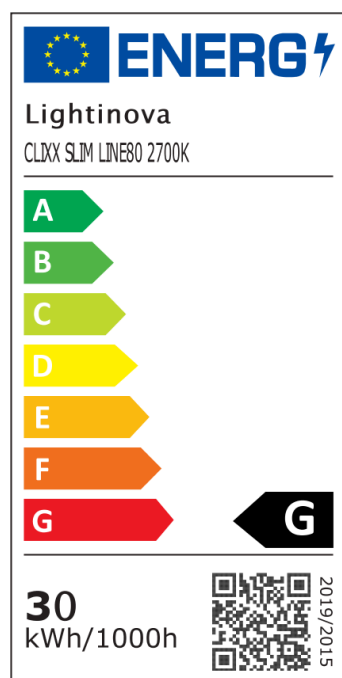



EAN	6150714033062
SKU	CS.2722021.0311
Energy rating	G
Collection	CLIXX SLIM
Colour	White
IP rating	IP20
Light source	LED
Power	30 W
Lumen	1970 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	65.7 Lm/W
Lifetime	>50.000h
Beam angle	Diffuse
Driver	-
Voltage	24 V
Input voltage	110-240 V
Dim	Dali
Package dimensions	844 x 83 x 51 mm
Product dimensions	22.5 x 800 x 40 mm
Package weight	920 g
HS code	94054990
ETL code	5028942
Material	Aluminium
Warranty	2 years



CLIXX SLIM LINE80



DIMENSIONS

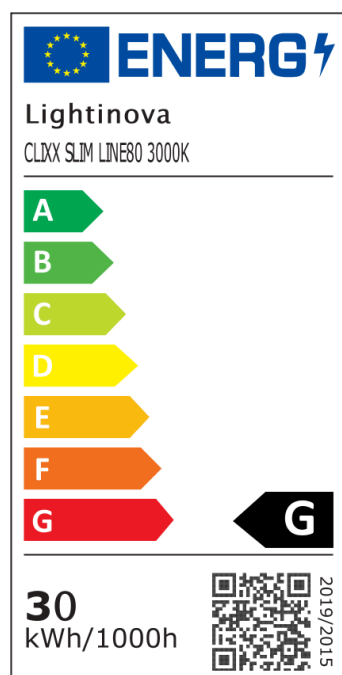



EAN	9504737588271
SKU	CS.3012021.0308
Energy rating	G
Collection	CLIXX SLIM
Colour	White
IP rating	IP20
Light source	LED
Power	30 W
Lumen	1970 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	65.7 Lm/W
Lifetime	>50.000h
Beam angle	Diffuse
Driver	-
Voltage	24 V
Input voltage	110-240 V
Dim	Triac
Package dimensions	844 x 83 x 51 mm
Product dimensions	22.5 x 800 x 40 mm
Package weight	920 g
HS code	94054990
ETL code	5028942
Material	Aluminium
Warranty	2 years



CLIXX SLIM LINE80



DIMENSIONS

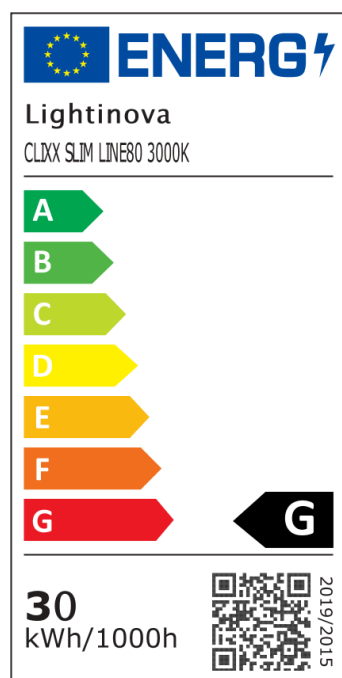

EAN	9503152774221
SKU	CS.3022021.0310
Energy rating	G
Collection	CLIXX SLIM
Colour	White
IP rating	IP20
Light source	LED
Power	30 W
Lumen	1970 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	65.7 Lm/W
Lifetime	>50.000h
Beam angle	Diffuse
Driver	-
Voltage	24 V
Input voltage	110-240 V
Dim	Dali
Package dimensions	844 x 83 x 51 mm
Product dimensions	22.5 x 800 x 40 mm
Package weight	920 g
HS code	94054990
ETL code	5028942
Material	Aluminium
Warranty	2 years

