



CONE TRIM MEDIUM - ADJUSTABLE

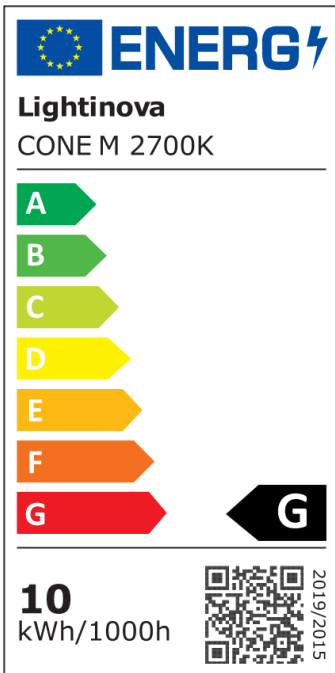

DIMENSIONS





EAN	9505414933186
SKU	CT.27120361.0113
Energy rating	G
Collection	CONE TRIM
Colour	Black
IP rating	IP20
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE




DIMENSIONS

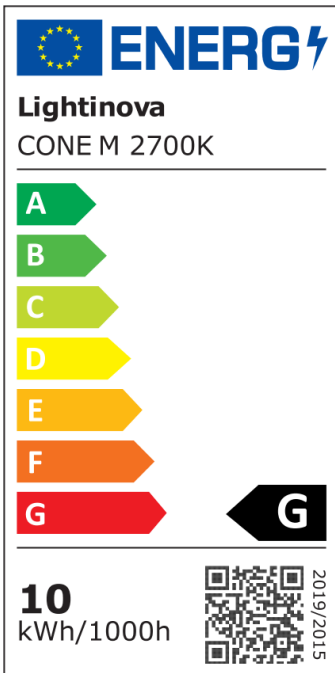



EAN	9503367935387
SKU	CT.27154361.0114
Energy rating	G
Collection	CONE TRIM
Colour	Black
IP rating	IP54
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE




DIMENSIONS

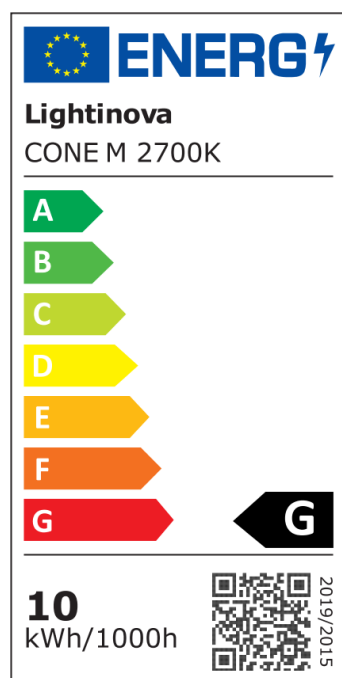



EAN	9505912525449
SKU	CT.27220361.0115
Energy rating	G
Collection	CONE TRIM
Colour	Black
IP rating	IP20
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

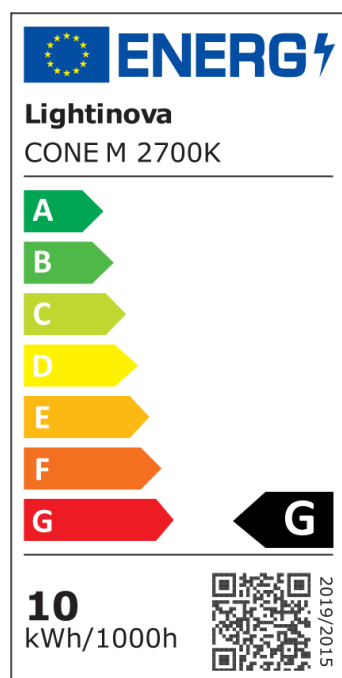



EAN	9501542443696
SKU	CT.27254361.0116
Energy rating	G
Collection	CONE TRIM
Colour	Black
IP rating	IP54
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE




DIMENSIONS

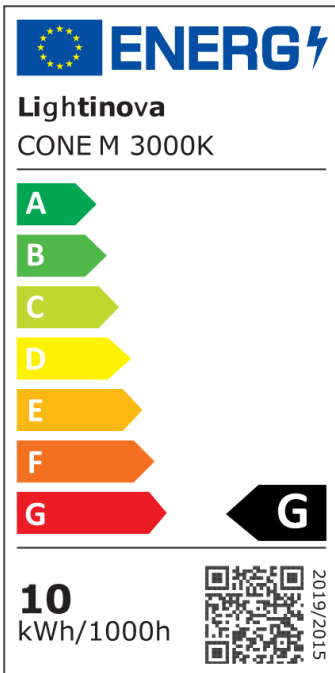



EAN	9505442175244
SKU	CT.30120361.0109
Energy rating	G
Collection	CONE TRIM
Colour	Black
IP rating	IP20
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

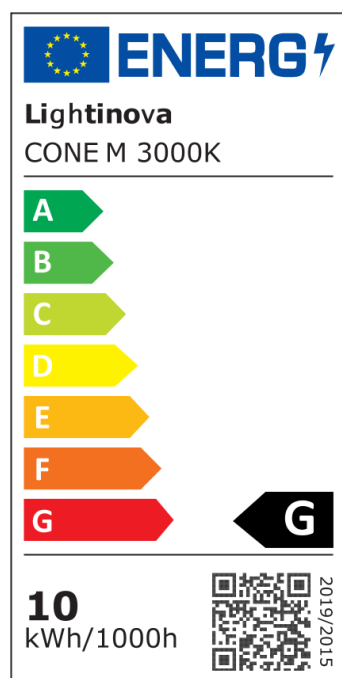



EAN	9502717187438
SKU	CT.30154361.0110
Energy rating	G
Collection	CONE TRIM
Colour	Black
IP rating	IP54
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

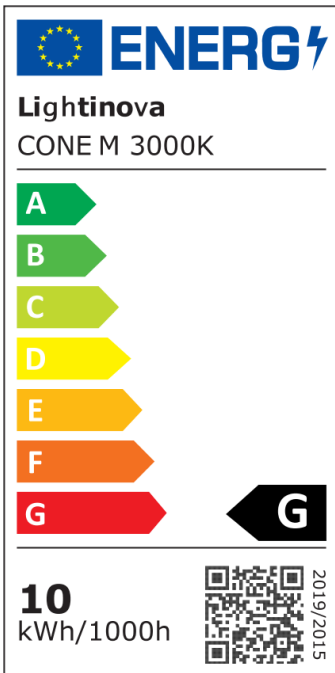



EAN	9505162567275
SKU	CT.30220361.0111
Energy rating	G
Collection	CONE TRIM
Colour	Black
IP rating	IP20
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

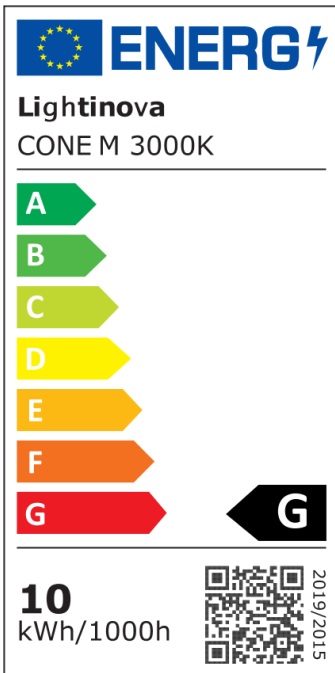


EAN	9505618624293
SKU	CT.30254361.0112
Energy rating	G
Collection	CONE TRIM
Colour	Black
IP rating	IP54
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS




EAN	9501387396560
SKU	CT.1120361.0117
Energy rating	-
Collection	CONE TRIM
Colour	Black
IP rating	IP20
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	DIM TO WARM
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS




EAN	9506223598290
SKU	CT.1154361.0118
Energy rating	-
Collection	CONE TRIM
Colour	Black
IP rating	IP54
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	DIM TO WARM
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS




EAN	9501997376792
SKU	CT.1220361.0119
Energy rating	-
Collection	CONE TRIM
Colour	Black
IP rating	IP20
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	DIM TO WARM
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS





EAN	9501111746838
SKU	CT.1254361.0120
Energy rating	-
Collection	CONE TRIM
Colour	Black
IP rating	IP54
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	DIM TO WARM
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE




DIMENSIONS

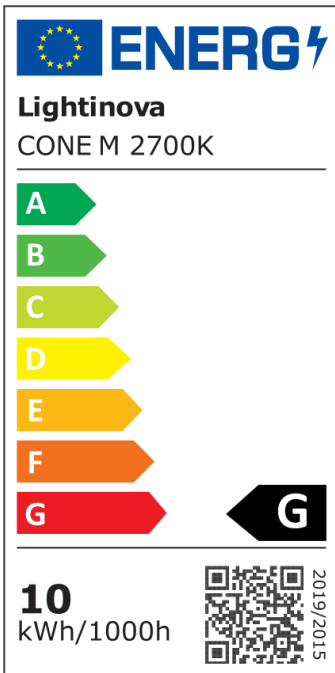



EAN	6150712465476
SKU	CT.27120361.0401
Energy rating	G
Collection	CONE TRIM
Colour	Black chrome
IP rating	IP20
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

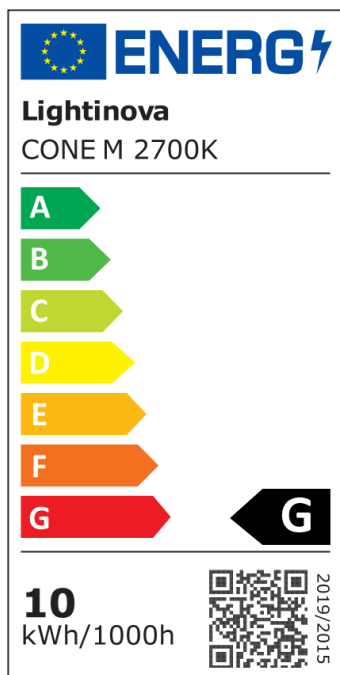



EAN	6150712474423
SKU	CT.27154361.0402
Energy rating	G
Collection	CONE TRIM
Colour	Black chrome
IP rating	IP54
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

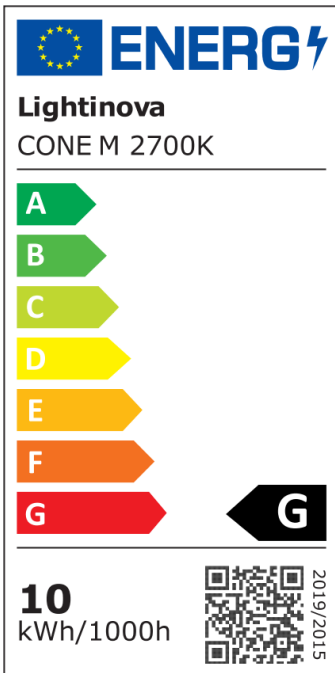



EAN	6150712478407
SKU	CT.27220361.0403
Energy rating	G
Collection	CONE TRIM
Colour	Black chrome
IP rating	IP20
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

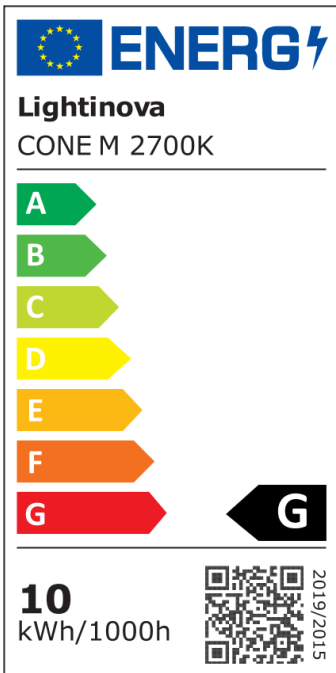



EAN	6150712485450
SKU	CT.27254361.0404
Energy rating	G
Collection	CONE TRIM
Colour	Black chrome
IP rating	IP54
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

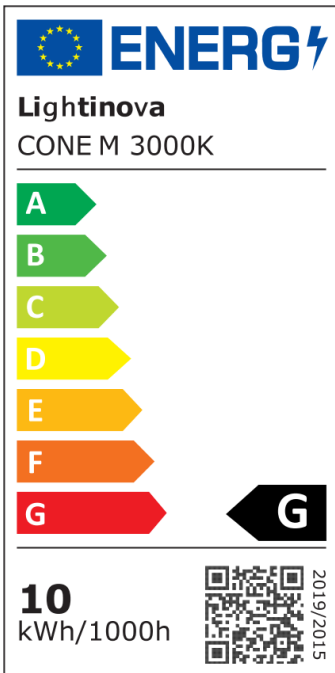



EAN	6150712436407
SKU	CT.30120361.0397
Energy rating	G
Collection	CONE TRIM
Colour	Black chrome
IP rating	IP20
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

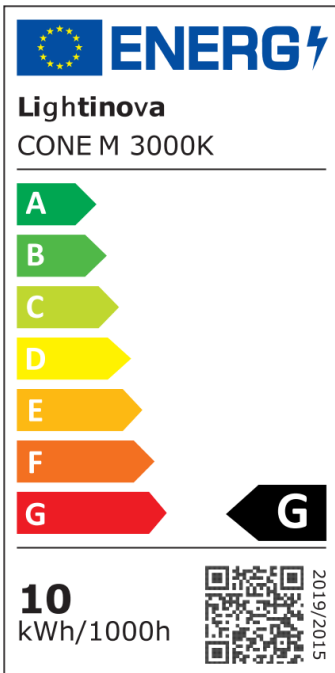



EAN	6150712438470
SKU	CT.30154361.0398
Energy rating	G
Collection	CONE TRIM
Colour	Black chrome
IP rating	IP54
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

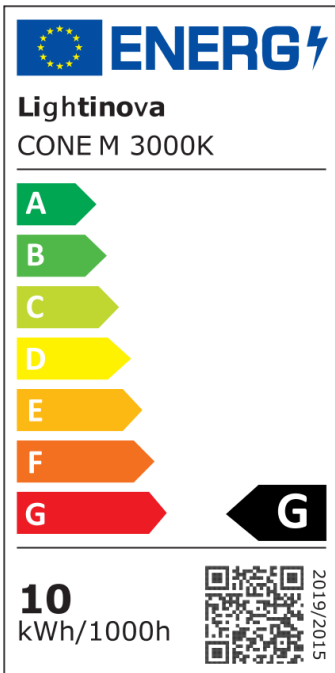



EAN	6150712456436
SKU	CT.30220361.0399
Energy rating	G
Collection	CONE TRIM
Colour	Black chrome
IP rating	IP20
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE




DIMENSIONS

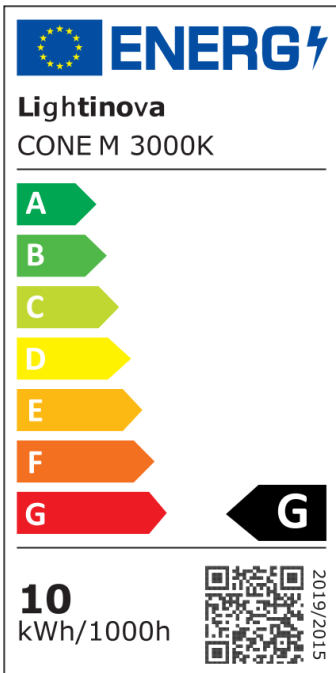


EAN	6150712459499
SKU	CT.30254361.0400
Energy rating	G
Collection	CONE TRIM
Colour	Black chrome
IP rating	IP54
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS




EAN	6150712492458
SKU	CT.1120361.0405
Energy rating	-
Collection	CONE TRIM
Colour	Black chrome
IP rating	IP20
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	DIM TO WARM
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS




EAN	6150712493417
SKU	CT.1154361.0406
Energy rating	-
Collection	CONE TRIM
Colour	Black chrome
IP rating	IP54
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	DIM TO WARM
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS



EAN 6150712494483

SKU CT.1220361.0407

Energy rating -

Collection CONE TRIM

Colour Black chrome

IP rating IP20

Light source LED

Power 10 W

Lumen 527 Lm

Colour temperature DIM TO WARM

Colour Rendering Index CRI>90

Efficacy 52.7 Lm/W

Lifetime >50.000h

Beam angle 36 D

Driver Yes

Voltage 24 V

Input voltage 220-240 V

Dim Dali

Package dimensions 100 x 100 x 70 mm

Product dimensions -

Package weight 210 g

HS code 94054990


ETL code -

Material Aluminium


Warranty 2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS





EAN	6150712495473
SKU	CT.1254361.0408
Energy rating	-
Collection	CONE TRIM
Colour	Black chrome
IP rating	IP54
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	DIM TO WARM
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

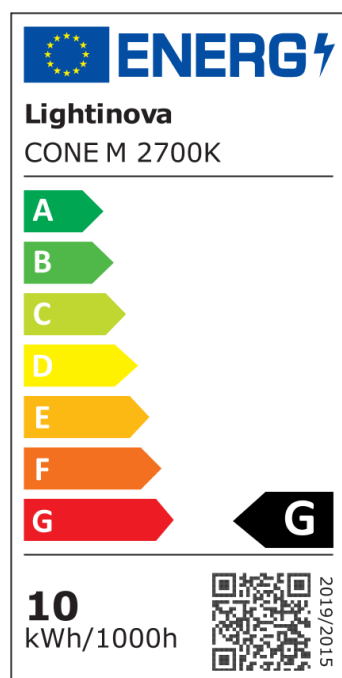



EAN	9508449861158
SKU	CT.27120361.0185
Energy rating	G
Collection	CONE TRIM
Colour	Bronze
IP rating	IP20
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years

CE

CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

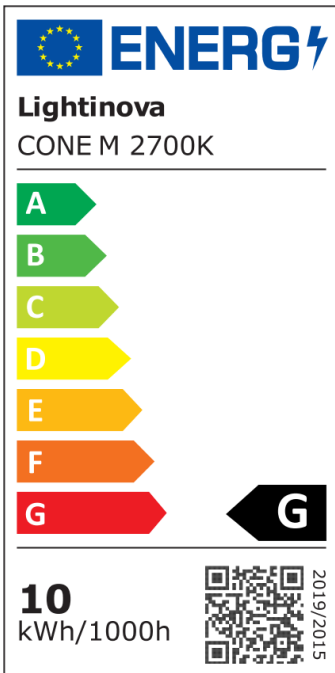



EAN	9501462548747
SKU	CT.27154361.0186
Energy rating	G
Collection	CONE TRIM
Colour	Bronze
IP rating	IP54
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

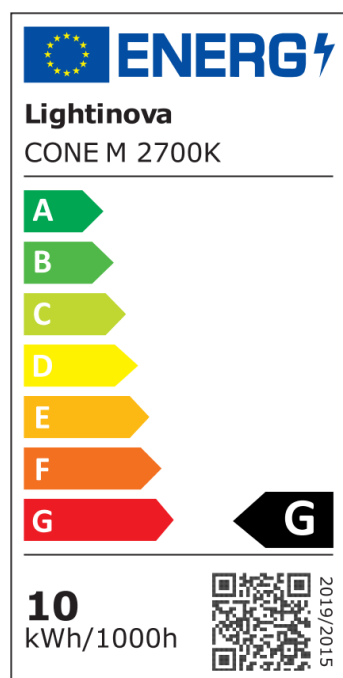



EAN	9502823226182
SKU	CT.27220361.0187
Energy rating	G
Collection	CONE TRIM
Colour	Bronze
IP rating	IP20
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

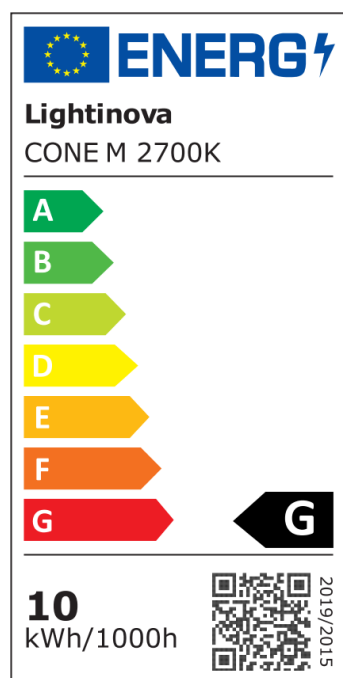



EAN	9508465493265
SKU	CT.27254361.0188
Energy rating	G
Collection	CONE TRIM
Colour	Bronze
IP rating	IP54
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

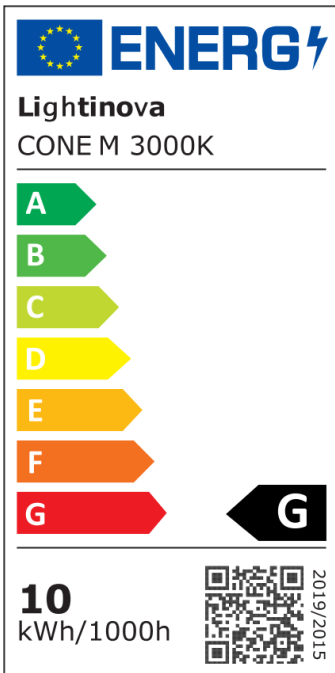



EAN	9502444398824
SKU	CT.30120361.0181
Energy rating	G
Collection	CONE TRIM
Colour	Bronze
IP rating	IP20
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

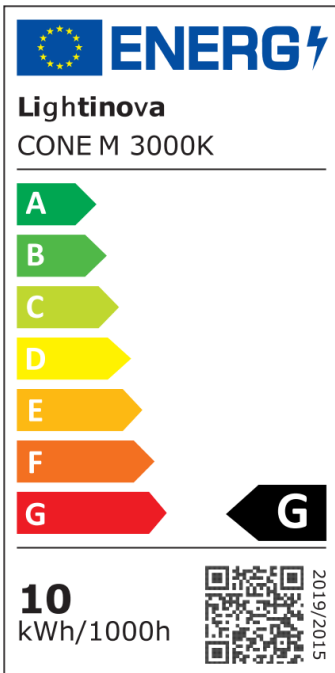



EAN	9508381975364
SKU	CT.30154361.0182
Energy rating	G
Collection	CONE TRIM
Colour	Bronze
IP rating	IP54
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

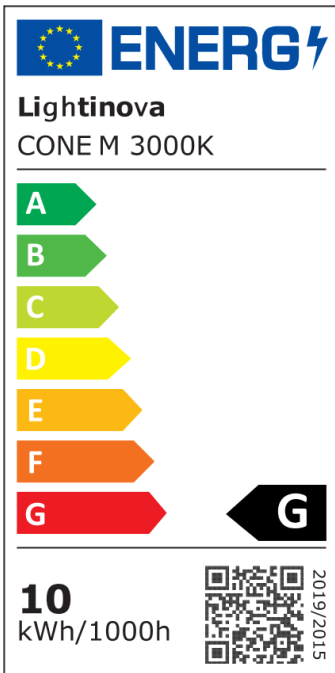



EAN	9506185352152
SKU	CT.30220361.0183
Energy rating	G
Collection	CONE TRIM
Colour	Bronze
IP rating	IP20
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

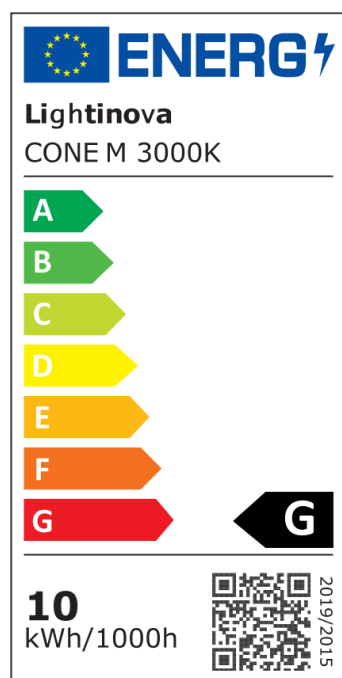


EAN	9504539933163
SKU	CT.30254361.0184
Energy rating	G
Collection	CONE TRIM
Colour	Bronze
IP rating	IP54
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS




EAN	9509285126968
SKU	CT.1120361.0189
Energy rating	-
Collection	CONE TRIM
Colour	Bronze
IP rating	IP20
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	DIM TO WARM
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS




EAN	9502846569860
SKU	CT.1154361.0190
Energy rating	-
Collection	CONE TRIM
Colour	Bronze
IP rating	IP54
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	DIM TO WARM
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS




EAN	9505815981199
SKU	CT.1220361.0191
Energy rating	-
Collection	CONE TRIM
Colour	Bronze
IP rating	IP20
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	DIM TO WARM
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS





EAN	9501334497661
SKU	CT.1254361.0192
Energy rating	-
Collection	CONE TRIM
Colour	Bronze
IP rating	IP54
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	DIM TO WARM
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

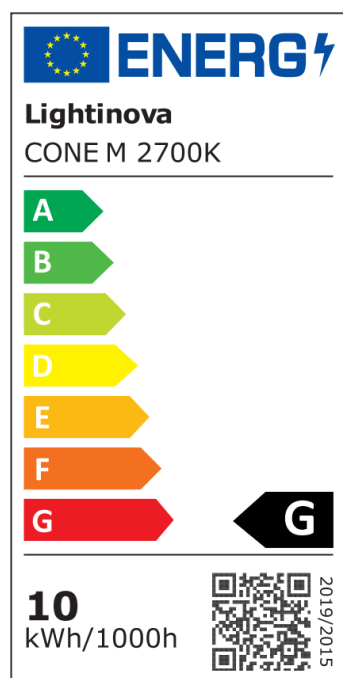



EAN	9503856751153
SKU	CT.27120361.0257
Energy rating	G
Collection	CONE TRIM
Colour	Champagne
IP rating	IP20
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

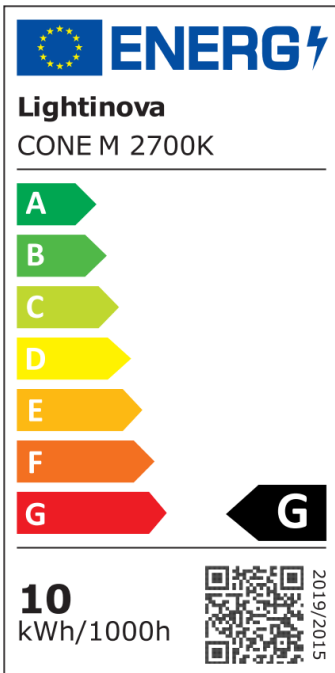



EAN	9509858435176
SKU	CT.27154361.0258
Energy rating	G
Collection	CONE TRIM
Colour	Champagne
IP rating	IP54
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

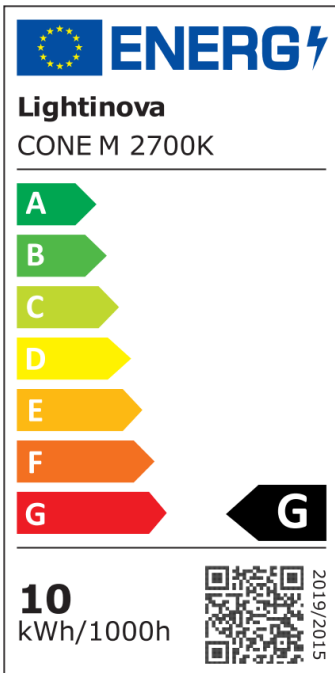



EAN	9505631444540
SKU	CT.27220361.0259
Energy rating	G
Collection	CONE TRIM
Colour	Champagne
IP rating	IP20
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

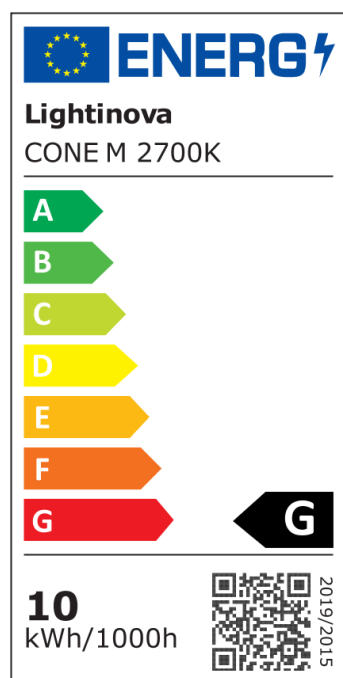



EAN	9505419337651
SKU	CT.27254361.0260
Energy rating	G
Collection	CONE TRIM
Colour	Champagne
IP rating	IP54
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

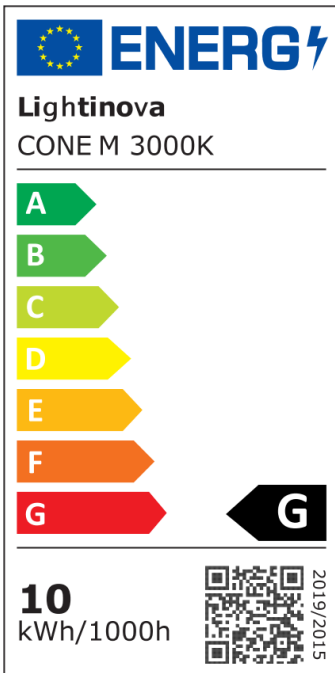



EAN	9507313354468
SKU	CT.30120361.0253
Energy rating	G
Collection	CONE TRIM
Colour	Champagne
IP rating	IP20
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

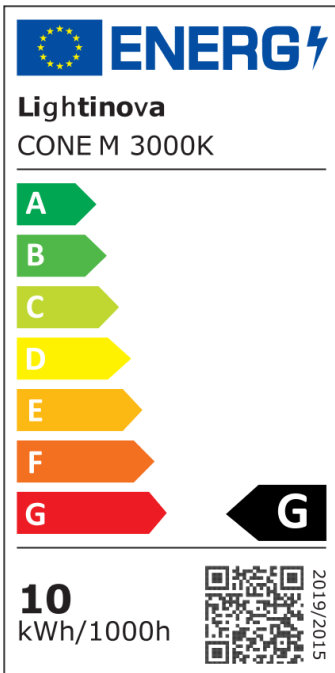



EAN	9507487289498
SKU	CT.30154361.0254
Energy rating	G
Collection	CONE TRIM
Colour	Champagne
IP rating	IP54
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

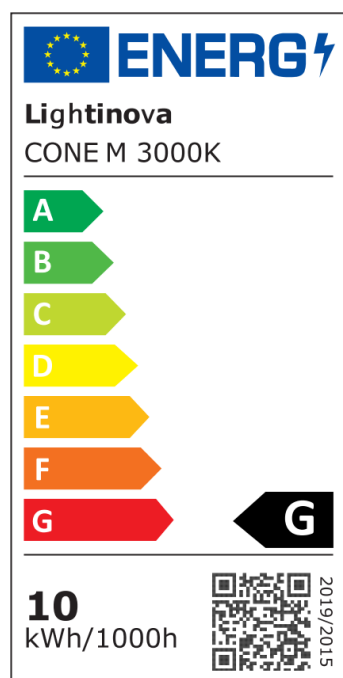



EAN	9503899898884
SKU	CT.30220361.0255
Energy rating	G
Collection	CONE TRIM
Colour	Champagne
IP rating	IP20
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

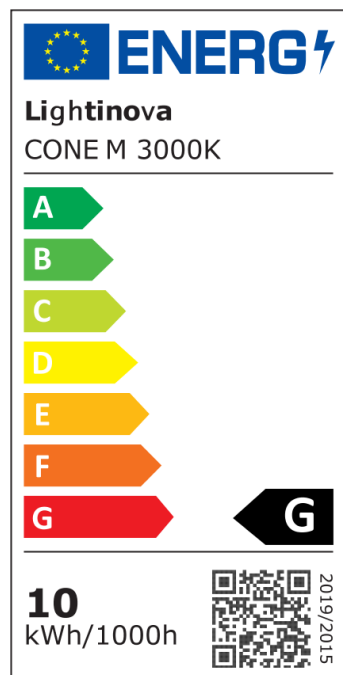


EAN	9502585636755
SKU	CT.30254361.0256
Energy rating	G
Collection	CONE TRIM
Colour	Champagne
IP rating	IP54
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS




EAN	9507774297137
SKU	CT.1120361.0261
Energy rating	-
Collection	CONE TRIM
Colour	Champagne
IP rating	IP20
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	DIM TO WARM
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS




EAN	9502876287963
SKU	CT.1154361.0262
Energy rating	-
Collection	CONE TRIM
Colour	Champagne
IP rating	IP54
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	DIM TO WARM
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS




EAN	9506655513113
SKU	CT.1220361.0263
Energy rating	-
Collection	CONE TRIM
Colour	Champagne
IP rating	IP20
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	DIM TO WARM
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS





EAN	9501476672759
SKU	CT.1254361.0264
Energy rating	-
Collection	CONE TRIM
Colour	Champagne
IP rating	IP54
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	DIM TO WARM
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

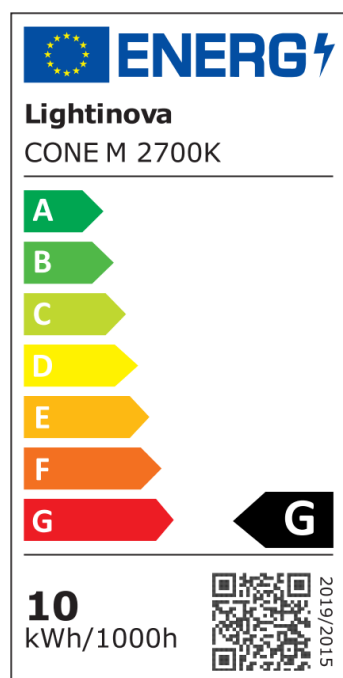



EAN	9501661886381
SKU	CT.27120361.0329
Energy rating	G
Collection	CONE TRIM
Colour	Gold
IP rating	IP20
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

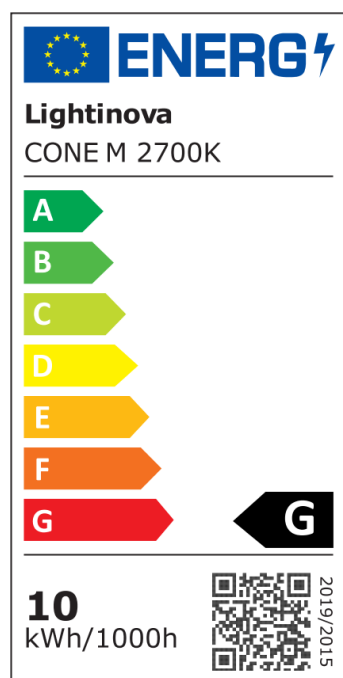



EAN	9508994484949
SKU	CT.27154361.0330
Energy rating	G
Collection	CONE TRIM
Colour	Gold
IP rating	IP54
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

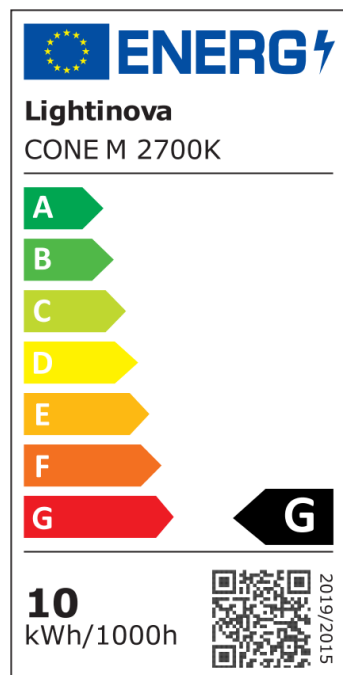



EAN	9505749549342
SKU	CT.27220361.0331
Energy rating	G
Collection	CONE TRIM
Colour	Gold
IP rating	IP20
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

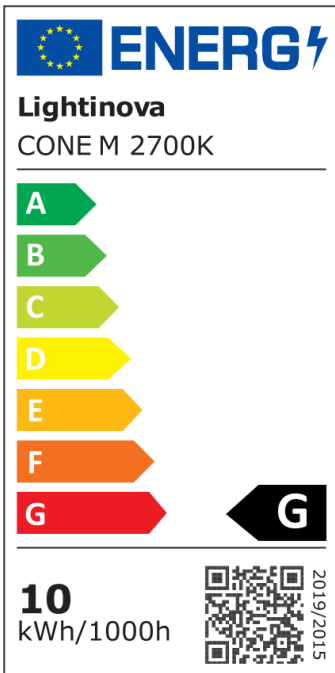



EAN	9505885822569
SKU	CT.27254361.0332
Energy rating	G
Collection	CONE TRIM
Colour	Gold
IP rating	IP54
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

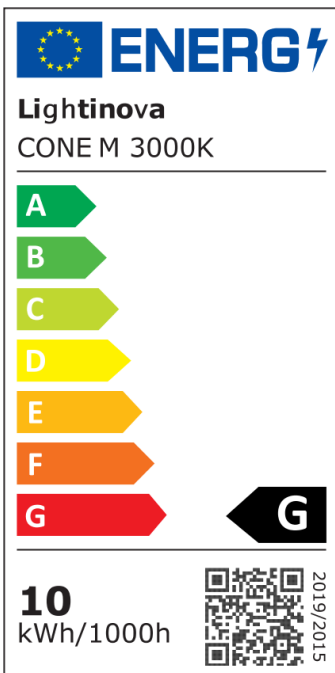



EAN	9501334841389
SKU	CT.30120361.0325
Energy rating	G
Collection	CONE TRIM
Colour	Gold
IP rating	IP20
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

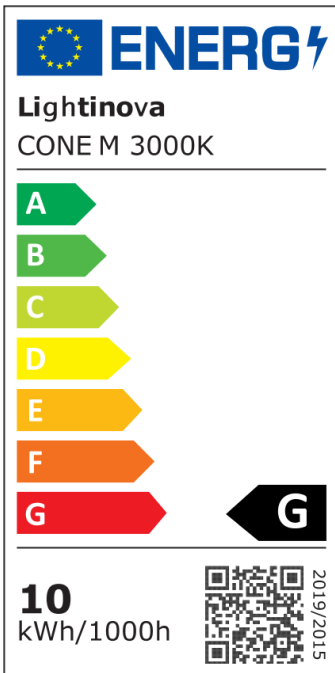



EAN	9504288243230
SKU	CT.30154361.0326
Energy rating	G
Collection	CONE TRIM
Colour	Gold
IP rating	IP54
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

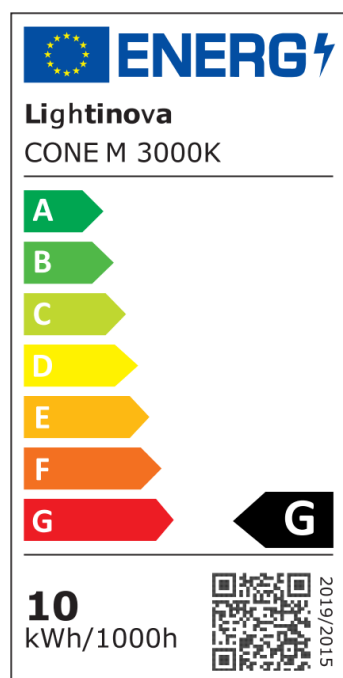



EAN	9508185616623
SKU	CT.30220361.0327
Energy rating	G
Collection	CONE TRIM
Colour	Gold
IP rating	IP20
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

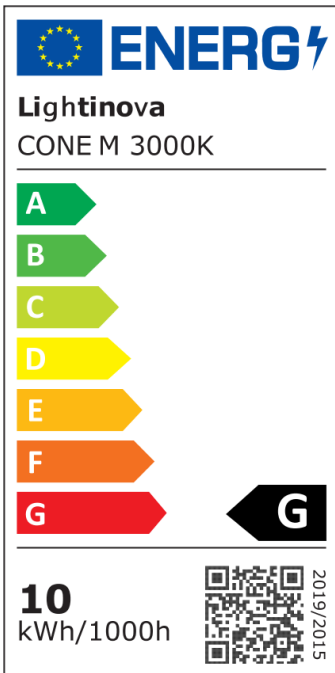


EAN	9501614387750
SKU	CT.30254361.0328
Energy rating	G
Collection	CONE TRIM
Colour	Gold
IP rating	IP54
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS




EAN	9501252755263
SKU	CT.1120361.0333
Energy rating	-
Collection	CONE TRIM
Colour	Gold
IP rating	IP20
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	DIM TO WARM
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS




EAN	9507663655680
SKU	CT.1154361.0334
Energy rating	-
Collection	CONE TRIM
Colour	Gold
IP rating	IP54
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	DIM TO WARM
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS




EAN	9502471917647
SKU	CT.1220361.0335
Energy rating	-
Collection	CONE TRIM
Colour	Gold
IP rating	IP20
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	DIM TO WARM
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS





EAN	9509345627114
SKU	CT.1254361.0336
Energy rating	-
Collection	CONE TRIM
Colour	Gold
IP rating	IP54
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	DIM TO WARM
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

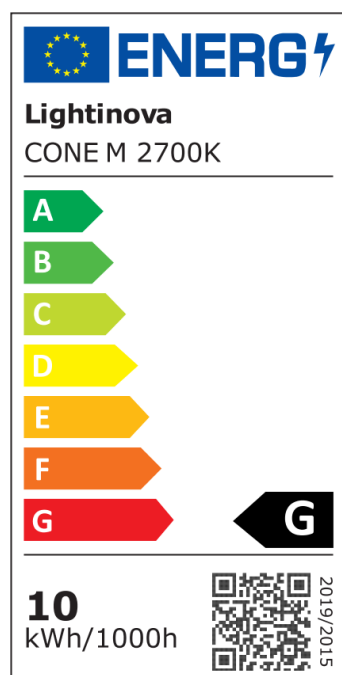



EAN	9506653477981
SKU	CT.27120361.0041
Energy rating	G
Collection	CONE TRIM
Colour	White
IP rating	IP20
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

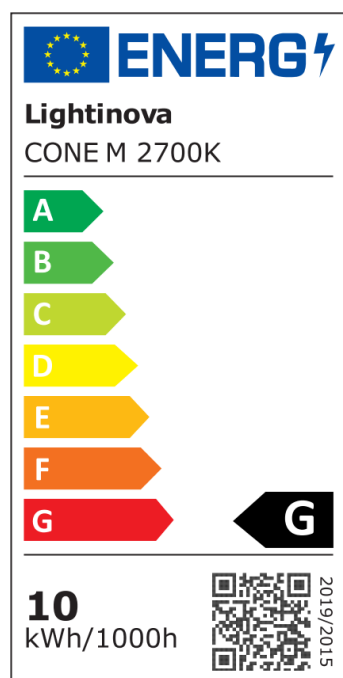



EAN	9502448732280
SKU	CT.27154361.0042
Energy rating	G
Collection	CONE TRIM
Colour	White
IP rating	IP54
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

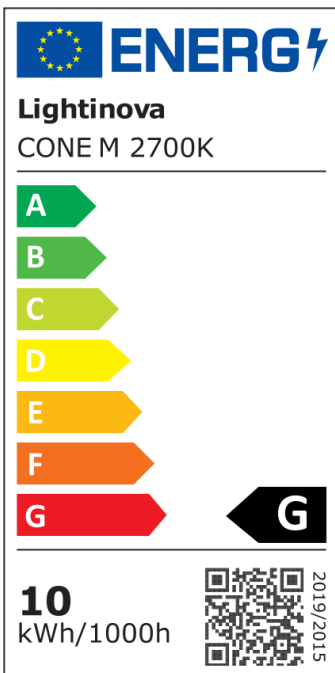



EAN	9502483675696
SKU	CT.27220361.0043
Energy rating	G
Collection	CONE TRIM
Colour	White
IP rating	IP20
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

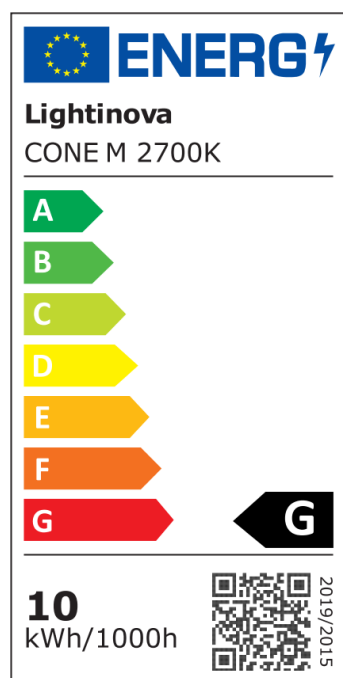



EAN	9504348852587
SKU	CT.27254361.0044
Energy rating	G
Collection	CONE TRIM
Colour	White
IP rating	IP54
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

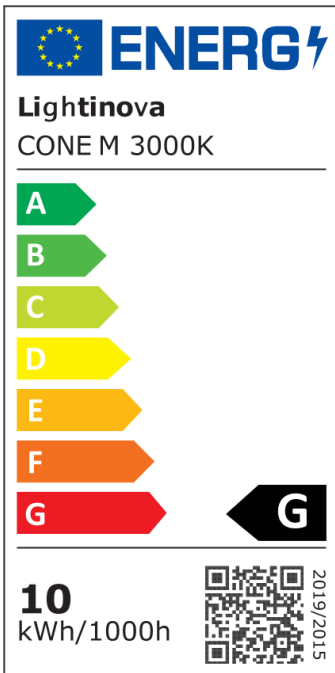



EAN	9505791491774
SKU	CT.30120361.0037
Energy rating	G
Collection	CONE TRIM
Colour	White
IP rating	IP20
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

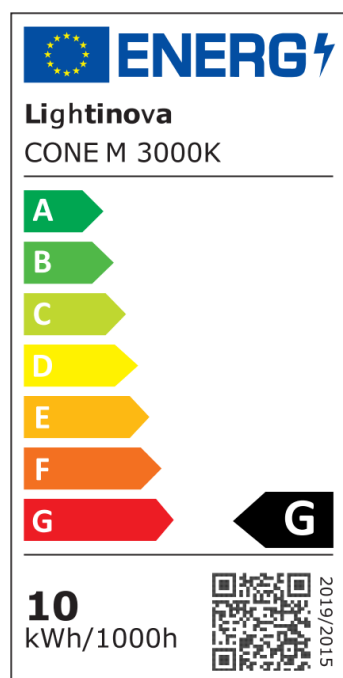



EAN	9507369357611
SKU	CT.30154361.0038
Energy rating	G
Collection	CONE TRIM
Colour	White
IP rating	IP54
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

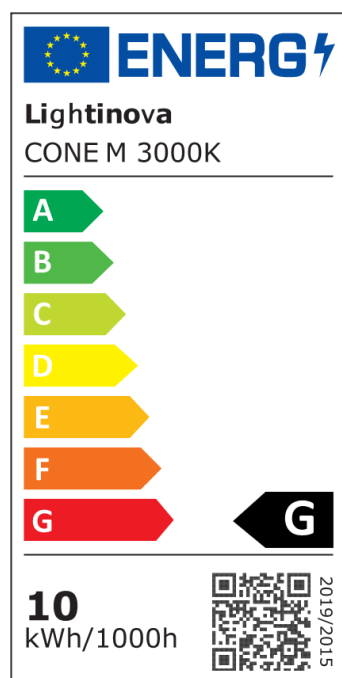



EAN	9508435465452
SKU	CT.30220361.0039
Energy rating	G
Collection	CONE TRIM
Colour	White
IP rating	IP20
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS

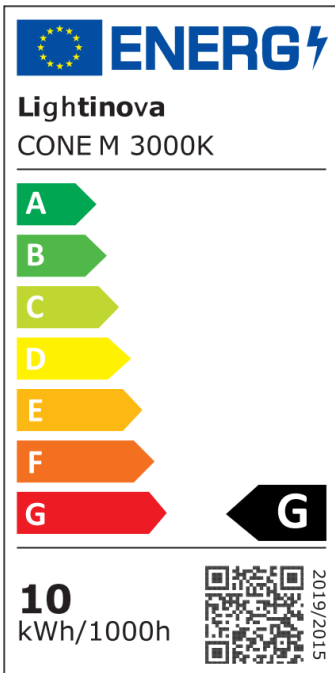


EAN	9507684985193
SKU	CT.30254361.0040
Energy rating	G
Collection	CONE TRIM
Colour	White
IP rating	IP54
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS




EAN	9505739274360
SKU	CT.1120361.0045
Energy rating	-
Collection	CONE TRIM
Colour	White
IP rating	IP20
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	DIM TO WARM
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS




EAN	9503328848411
SKU	CT.1154361.0046
Energy rating	-
Collection	CONE TRIM
Colour	White
IP rating	IP54
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	DIM TO WARM
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS




EAN	9508921562313
SKU	CT.1220361.0047
Energy rating	-
Collection	CONE TRIM
Colour	White
IP rating	IP20
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	DIM TO WARM
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



CONE TRIM MEDIUM - ADJUSTABLE



DIMENSIONS



EAN	9502721233374
SKU	CT.1254361.0048
Energy rating	-
Collection	CONE TRIM
Colour	White
IP rating	IP54
Light source	LED
Power	10 W
Lumen	527 Lm
Colour temperature	DIM TO WARM
Colour Rendering Index	CRI>90
Efficacy	52.7 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	100 x 100 x 70 mm
Product dimensions	-
Package weight	210 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years

