


PEEK RETRACTABLE RECESSED



DIMENSIONS



**ENERGY**

Lightinova
PEEK retractable spot 2700K

A

B

C

D

E

F

G

G

8
kWh/1000h



2019/2015


EAN	6150713816826
SKU	PK.27120241.0012
Energy rating	G
Collection	PEEK
Colour	Black
IP rating	IP20
Light source	LED
Power	8 W
Lumen	418 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	52.3 Lm/W
Lifetime	>50.000h
Beam angle	24 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	115 x 70 x 70 mm
Product dimensions	Ø55 x 100 mm
Package weight	250 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



PEEK RETRACTABLE RECESSED



DIMENSIONS



**ENERGY**

Lightinova
PEEK retractable spot 2700K

A

B

C

D

E

F

G

G

8
kWh/1000h


2019/2015



EAN	6150713837814
SKU	PK.27220241.0014
Energy rating	G
Collection	PEEK
Colour	Black
IP rating	IP20
Light source	LED
Power	8 W
Lumen	418 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	52.3 Lm/W
Lifetime	>50.000h
Beam angle	24 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	115 x 70 x 70 mm
Product dimensions	Ø55 x 100 mm
Package weight	250 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



PEEK RETRACTABLE RECESSED



DIMENSIONS

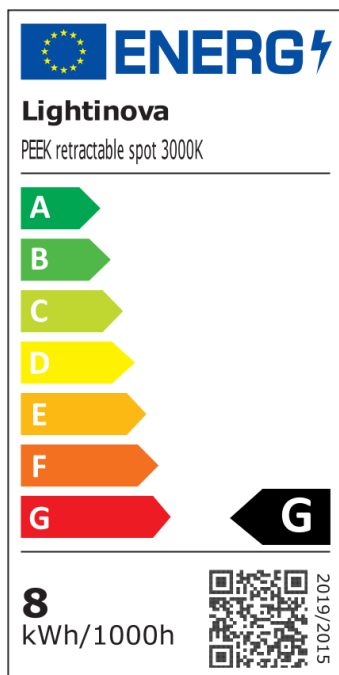



EAN	9508757321146
SKU	PK.30120241.0011
Energy rating	G
Collection	PEEK
Colour	Black
IP rating	IP20
Light source	LED
Power	8 W
Lumen	418 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	52.3 Lm/W
Lifetime	>50.000h
Beam angle	24 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	115 x 70 x 70 mm
Product dimensions	Ø55 x 100 mm
Package weight	250 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years

CE

PEEK RETRACTABLE RECESSED



DIMENSIONS

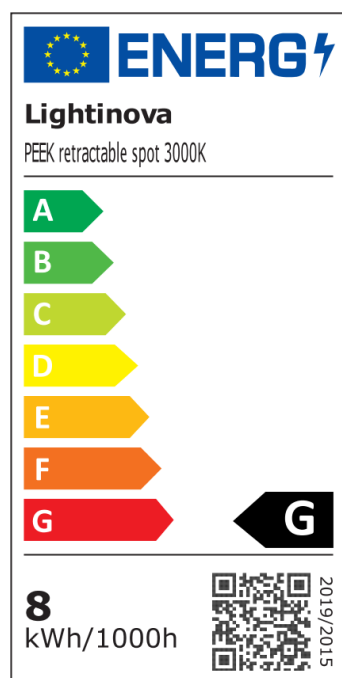



EAN	6150713825828
SKU	PK.30220241.0013
Energy rating	G
Collection	PEEK
Colour	Black
IP rating	IP20
Light source	LED
Power	8 W
Lumen	418 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	52.3 Lm/W
Lifetime	>50.000h
Beam angle	24 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	115 x 70 x 70 mm
Product dimensions	Ø55 x 100 mm
Package weight	250 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



PEEK RETRACTABLE RECESSED




DIMENSIONS

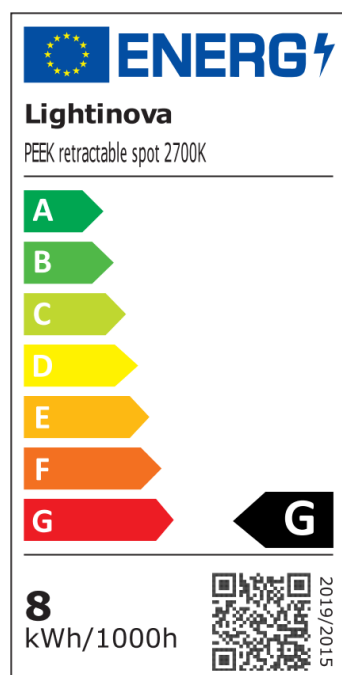


EAN	6150713839856
SKU	PK.27120241.0016
Energy rating	G
Collection	PEEK
Colour	White
IP rating	IP20
Light source	LED
Power	8 W
Lumen	418 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	52.3 Lm/W
Lifetime	>50.000h
Beam angle	24 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	115 x 70 x 70 mm
Product dimensions	Ø55 x 100 mm
Package weight	250 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



PEEK RETRACTABLE RECESSED



DIMENSIONS





EAN	6150713854842
SKU	PK.27220241.0018
Energy rating	G
Collection	PEEK
Colour	White
IP rating	IP20
Light source	LED
Power	8 W
Lumen	418 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	52.3 Lm/W
Lifetime	>50.000h
Beam angle	24 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	115 x 70 x 70 mm
Product dimensions	Ø55 x 100 mm
Package weight	250 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



PEEK RETRACTABLE RECESSED



DIMENSIONS

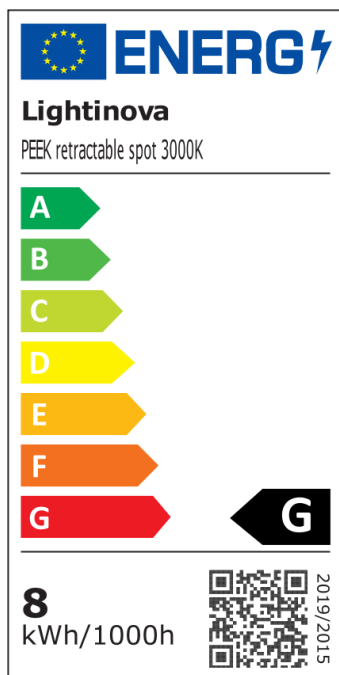



EAN	9505434159962
SKU	PK.30120241.0015
Energy rating	G
Collection	PEEK
Colour	White
IP rating	IP20
Light source	LED
Power	8 W
Lumen	418 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	52.3 Lm/W
Lifetime	>50.000h
Beam angle	24 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	115 x 70 x 70 mm
Product dimensions	Ø55 x 100 mm
Package weight	250 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



PEEK RETRACTABLE RECESSED



DIMENSIONS

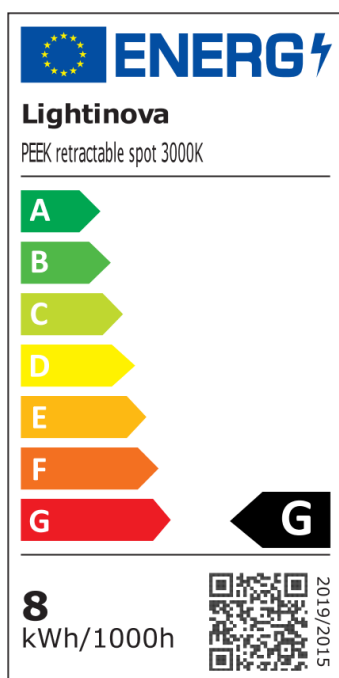

EAN	6150713847882
SKU	PK.30220241.0017
Energy rating	G
Collection	PEEK
Colour	White
IP rating	IP20
Light source	LED
Power	8 W
Lumen	418 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	52.3 Lm/W
Lifetime	>50.000h
Beam angle	24 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	115 x 70 x 70 mm
Product dimensions	Ø55 x 100 mm
Package weight	250 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years

