



SPOT40 SEMI-RECESSED

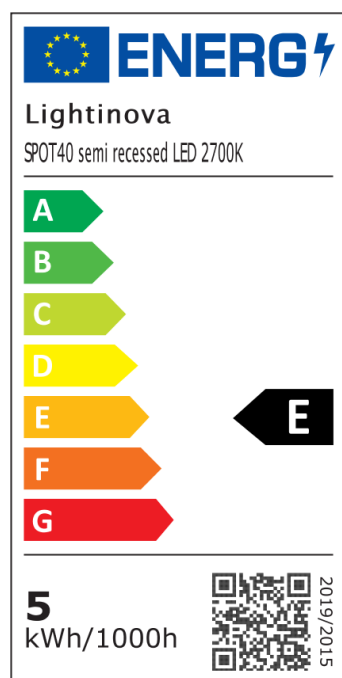

DIMENSIONS





EAN	9501178593451
SKU	S40.27120361.0019
Energy rating	E
Collection	SPOT40
Colour	Brushed black
IP rating	IP20
Light source	LED
Power	4.5 W
Lumen	540 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	120 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	220 x 105 x 105 mm
Product dimensions	ø40 x 95 mm
Package weight	470 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



SPOT40 SEMI-RECESSED



DIMENSIONS

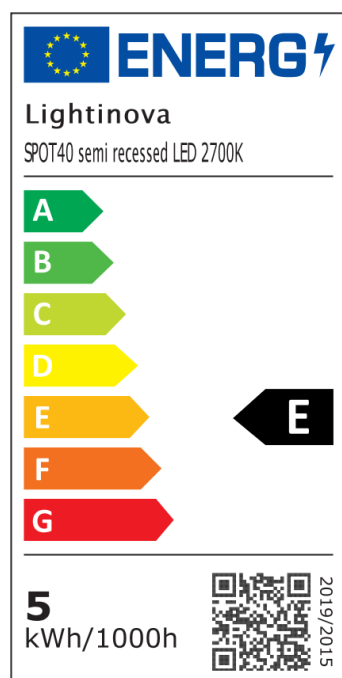



EAN	9501362129572
SKU	S40.27220361.0020
Energy rating	E
Collection	SPOT40
Colour	Brushed black
IP rating	IP20
Light source	LED
Power	4.5 W
Lumen	540 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	120 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	220 x 105 x 105 mm
Product dimensions	ø40 x 95 mm
Package weight	470 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



SPOT40 SEMI-RECESSED



DIMENSIONS

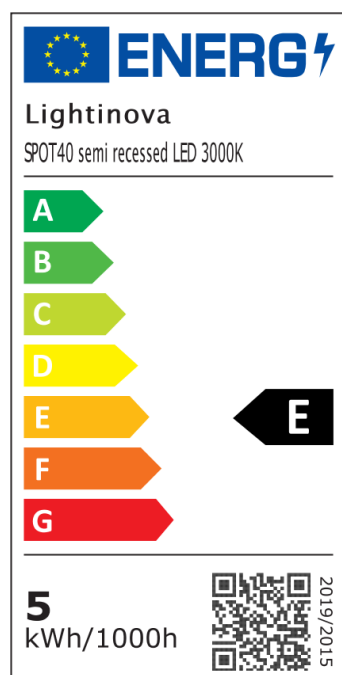



EAN	9507816999357
SKU	S40.30120361.0017
Energy rating	E
Collection	SPOT40
Colour	Brushed black
IP rating	IP20
Light source	LED
Power	4.5 W
Lumen	540 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	120 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	220 x 105 x 105 mm
Product dimensions	ø40 x 95 mm
Package weight	470 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years

CE

SPOT40 SEMI-RECESSED



DIMENSIONS

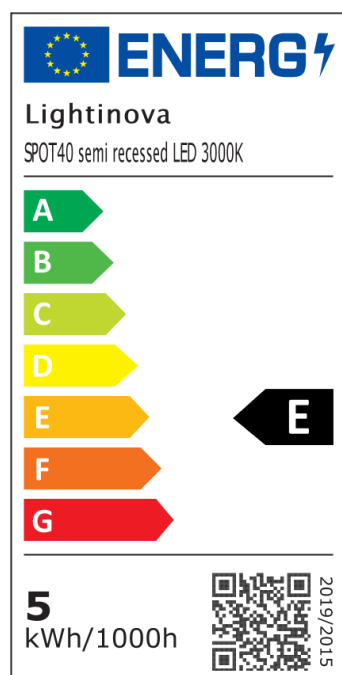



EAN	9509494416737
SKU	S40.30220361.0018
Energy rating	E
Collection	SPOT40
Colour	Brushed black
IP rating	IP20
Light source	LED
Power	4.5 W
Lumen	540 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	120 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	220 x 105 x 105 mm
Product dimensions	ø40 x 95 mm
Package weight	470 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years

CE

SPOT40 SEMI-RECESSED



DIMENSIONS

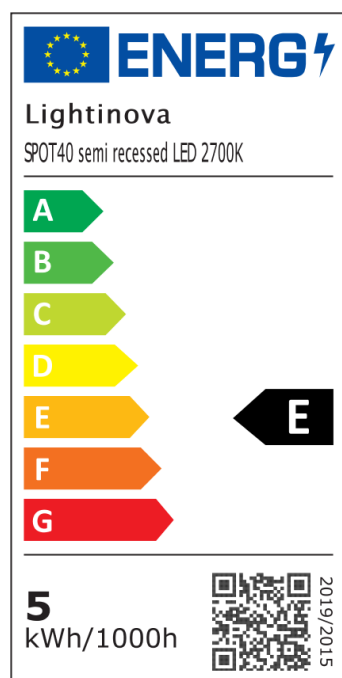



EAN	9508862221485
SKU	S40.27120361.0031
Energy rating	E
Collection	SPOT40
Colour	Brushed bronze
IP rating	IP20
Light source	LED
Power	4.5 W
Lumen	540 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	120 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	220 x 105 x 105 mm
Product dimensions	ø40 x 95 mm
Package weight	470 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



SPOT40 SEMI-RECESSED



DIMENSIONS

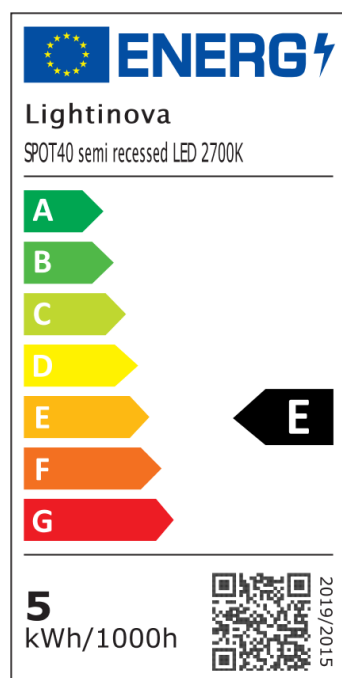



EAN	9505446479942
SKU	S40.27220361.0032
Energy rating	E
Collection	SPOT40
Colour	Brushed bronze
IP rating	IP20
Light source	LED
Power	4.5 W
Lumen	540 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	120 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	220 x 105 x 105 mm
Product dimensions	ø40 x 95 mm
Package weight	470 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years

CE

SPOT40 SEMI-RECESSED



DIMENSIONS

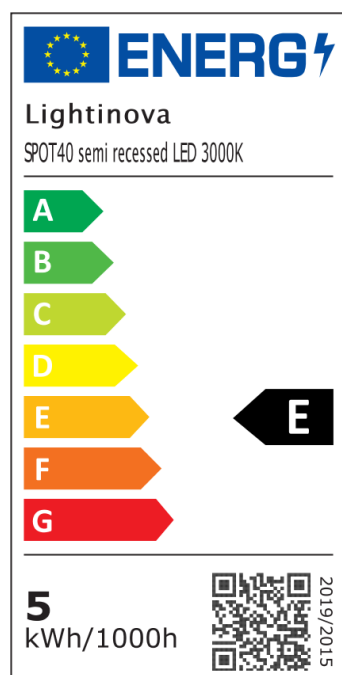


EAN	9501672526672
SKU	S40.30120361.0029
Energy rating	E
Collection	SPOT40
Colour	Brushed bronze
IP rating	IP20
Light source	LED
Power	4.5 W
Lumen	540 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	120 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	220 x 105 x 105 mm
Product dimensions	ø40 x 95 mm
Package weight	470 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years

CE

SPOT40 SEMI-RECESSED



DIMENSIONS



**ENERGY**

Lightinova
SPOT40 semi recessed LED 3000K

A

B

C

D

E

F

G

E

5

kWh/1000h



2019/2015



EAN	9501841226525
SKU	S40.30220361.0030
Energy rating	E
Collection	SPOT40
Colour	Brushed bronze
IP rating	IP20
Light source	LED
Power	4.5 W
Lumen	540 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	120 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	220 x 105 x 105 mm
Product dimensions	ø40 x 95 mm
Package weight	470 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



SPOT40 SEMI-RECESSED



DIMENSIONS

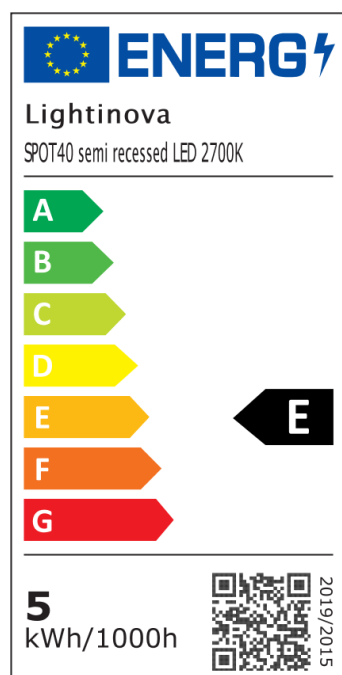



EAN	9506359337763
SKU	S40.27120361.0023
Energy rating	E
Collection	SPOT40
Colour	Brushed champagne
IP rating	IP20
Light source	LED
Power	4.5 W
Lumen	540 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	120 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	220 x 105 x 105 mm
Product dimensions	ø40 x 95 mm
Package weight	470 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years

CE

SPOT40 SEMI-RECESSED



DIMENSIONS

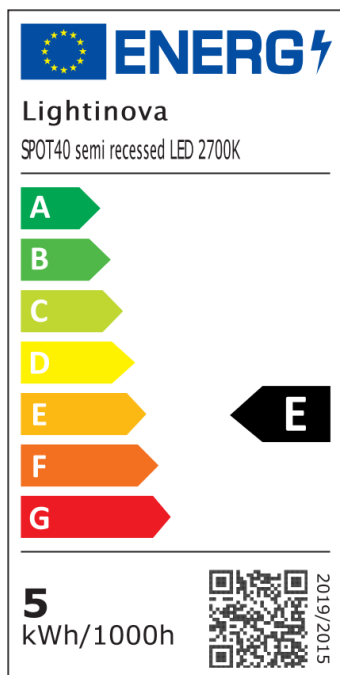



EAN	9503932144251
SKU	S40.27220361.0024
Energy rating	E
Collection	SPOT40
Colour	Brushed champagne
IP rating	IP20
Light source	LED
Power	4.5 W
Lumen	540 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	120 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	220 x 105 x 105 mm
Product dimensions	ø40 x 95 mm
Package weight	470 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years

CE

SPOT40 SEMI-RECESSED



DIMENSIONS

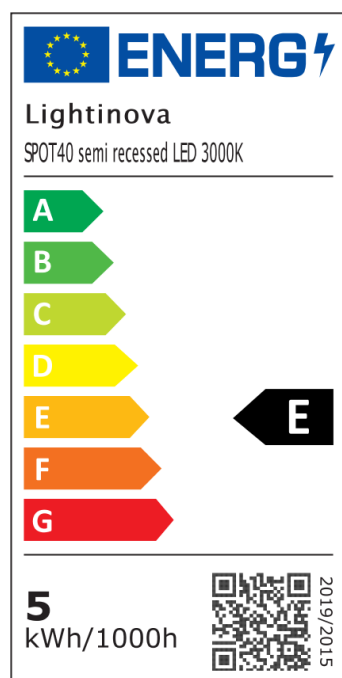


EAN	9505969941490
SKU	S40.30120361.0021
Energy rating	E
Collection	SPOT40
Colour	Brushed champagne
IP rating	IP20
Light source	LED
Power	4.5 W
Lumen	540 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	120 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	220 x 105 x 105 mm
Product dimensions	ø40 x 95 mm
Package weight	470 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



SPOT40 SEMI-RECESSED



DIMENSIONS



**ENERGY**

Lightinova
SPOT40 semi recessed LED 3000K

A

B

C

D

E

F

G

E

5

kWh/1000h



2019/2015



EAN	9507488446579
SKU	S40.30220361.0022
Energy rating	E
Collection	SPOT40
Colour	Brushed champagne
IP rating	IP20
Light source	LED
Power	4.5 W
Lumen	540 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	120 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	220 x 105 x 105 mm
Product dimensions	ø40 x 95 mm
Package weight	470 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



SPOT40 SEMI-RECESSED



DIMENSIONS

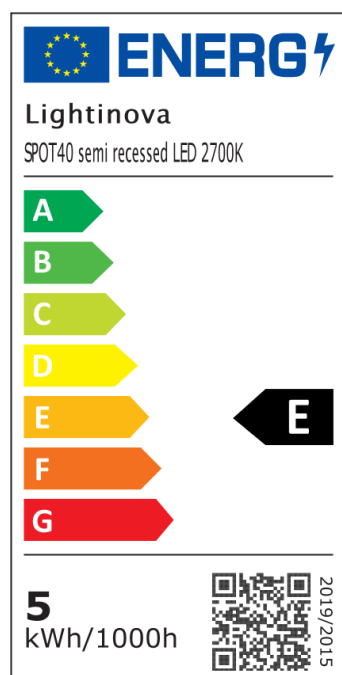



EAN	9504163419934
SKU	S40.27120361.0027
Energy rating	E
Collection	SPOT40
Colour	Brushed gold
IP rating	IP20
Light source	LED
Power	4.5 W
Lumen	540 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	120 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	220 x 105 x 105 mm
Product dimensions	ø40 x 95 mm
Package weight	470 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



SPOT40 SEMI-RECESSED



DIMENSIONS

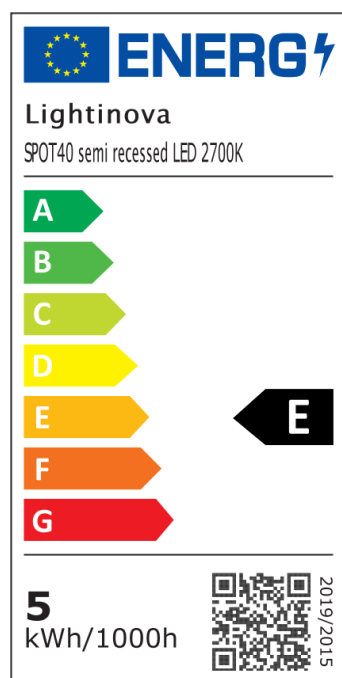



EAN	9508699895774
SKU	S40.27220361.0028
Energy rating	E
Collection	SPOT40
Colour	Brushed gold
IP rating	IP20
Light source	LED
Power	4.5 W
Lumen	540 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	120 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	220 x 105 x 105 mm
Product dimensions	ø40 x 95 mm
Package weight	470 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years

CE

SPOT40 SEMI-RECESSED



DIMENSIONS

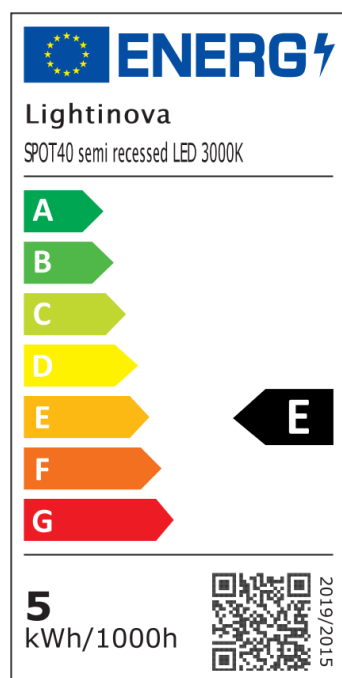



EAN	9507927611285
SKU	S40.30120361.0025
Energy rating	E
Collection	SPOT40
Colour	Brushed gold
IP rating	IP20
Light source	LED
Power	4.5 W
Lumen	540 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	120 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	220 x 105 x 105 mm
Product dimensions	ø40 x 95 mm
Package weight	470 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years

CE

SPOT40 SEMI-RECESSED



DIMENSIONS

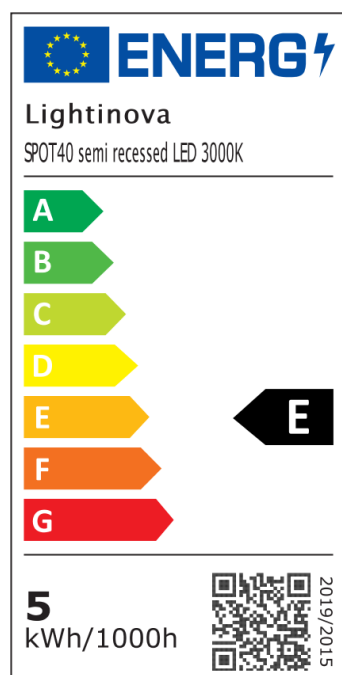

EAN	9509676823148
SKU	S40.30220361.0026
Energy rating	E
Collection	SPOT40
Colour	Brushed gold
IP rating	IP20
Light source	LED
Power	4.5 W
Lumen	540 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	120 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	220 x 105 x 105 mm
Product dimensions	ø40 x 95 mm
Package weight	470 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years

