



SPOT RECESSED SPOT30 ADJUSTABLE

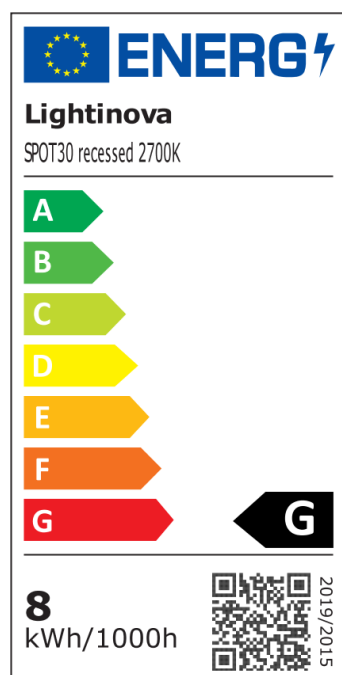

DIMENSIONS





EAN	6150713788727
SKU	SP.27120361.0020
Energy rating	G
Collection	SPOT
Colour	Black
IP rating	IP20
Light source	LED
Power	8 W
Lumen	418 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	52.3 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	115 x 70 x 70 mm
Product dimensions	115 x 70 x 70 mm
Package weight	200 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



SPOT RECESSED SPOT30 ADJUSTABLE



DIMENSIONS

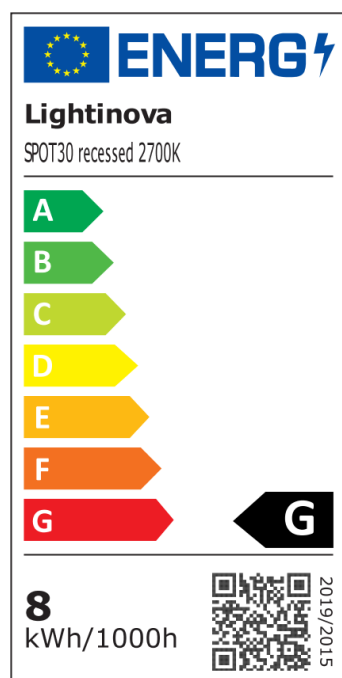



EAN	6150713793783
SKU	SP.27220361.0022
Energy rating	G
Collection	SPOT
Colour	Black
IP rating	IP20
Light source	LED
Power	8 W
Lumen	418 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	52.3 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	115 x 70 x 70 mm
Product dimensions	115 x 70 x 70 mm
Package weight	200 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



SPOT RECESSED SPOT30 ADJUSTABLE



DIMENSIONS

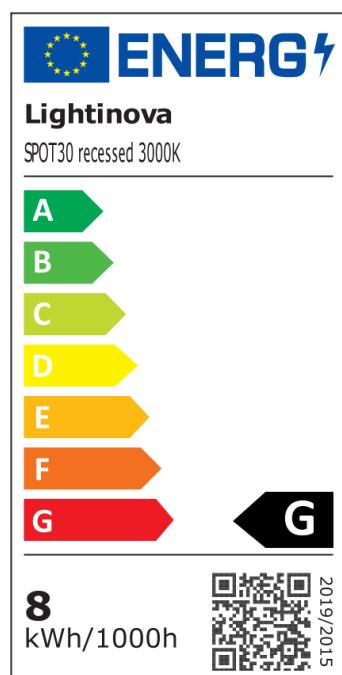



EAN	9507413477623
SKU	SP.30120361.0019
Energy rating	G
Collection	SPOT
Colour	Black
IP rating	IP20
Light source	LED
Power	8 W
Lumen	418 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	52.3 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	115 x 70 x 70 mm
Product dimensions	115 x 70 x 70 mm
Package weight	200 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



SPOT RECESSED SPOT30 ADJUSTABLE



DIMENSIONS

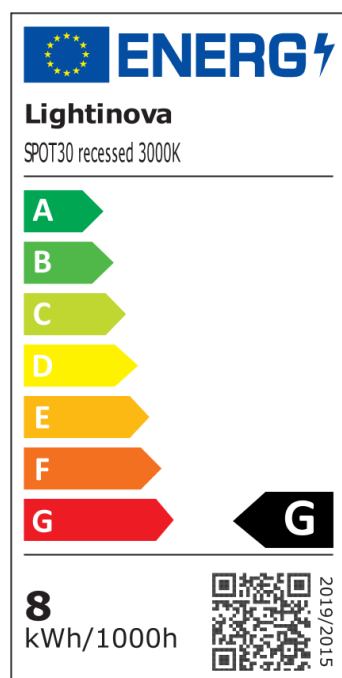



EAN	6150713793707
SKU	SP.30220361.0021
Energy rating	G
Collection	SPOT
Colour	Black
IP rating	IP20
Light source	LED
Power	8 W
Lumen	418 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	52.3 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	115 x 70 x 70 mm
Product dimensions	115 x 70 x 70 mm
Package weight	200 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



SPOT RECESSED SPOT30 ADJUSTABLE



DIMENSIONS

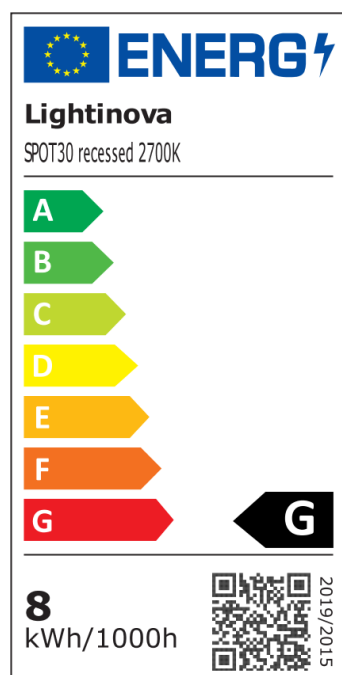


EAN	6150713774782
SKU	SP.27120361.0016
Energy rating	G
Collection	SPOT
Colour	White
IP rating	IP20
Light source	LED
Power	8 W
Lumen	418 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	52.3 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	115 x 70 x 70 mm
Product dimensions	115 x 70 x 70 mm
Package weight	200 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



SPOT RECESSED SPOT30 ADJUSTABLE



DIMENSIONS





Lightinova
SPOT30 recessed 2700K

A

B

C

D

E

F

G

G

8

kWh/1000h



2019/2015



EAN	6150713779763
SKU	SP.27220361.0018
Energy rating	G
Collection	SPOT
Colour	White
IP rating	IP20
Light source	LED
Power	8 W
Lumen	418 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	52.3 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	115 x 70 x 70 mm
Product dimensions	115 x 70 x 70 mm
Package weight	200 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



SPOT RECESSED SPOT30 ADJUSTABLE



DIMENSIONS

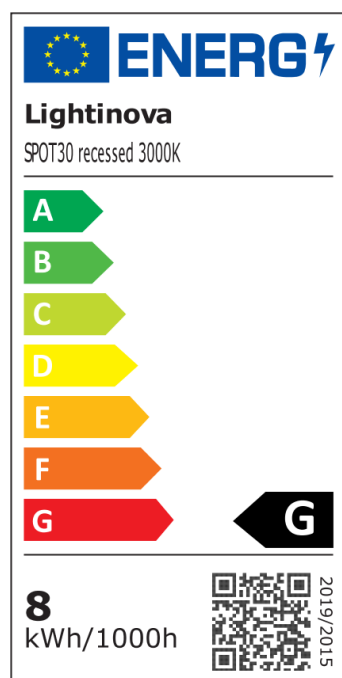



EAN	9502973866290
SKU	SP.30120361.0015
Energy rating	G
Collection	SPOT
Colour	White
IP rating	IP20
Light source	LED
Power	8 W
Lumen	418 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	52.3 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	115 x 70 x 70 mm
Product dimensions	115 x 70 x 70 mm
Package weight	200 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



SPOT RECESSED SPOT30 ADJUSTABLE



DIMENSIONS

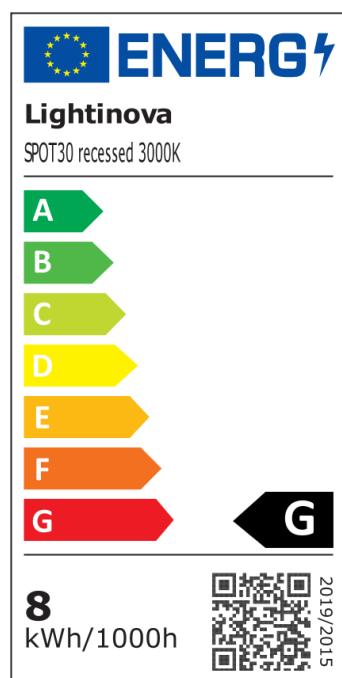

EAN	6150713777790
SKU	SP.30220361.0017
Energy rating	G
Collection	SPOT
Colour	White
IP rating	IP20
Light source	LED
Power	8 W
Lumen	418 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	52.3 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Dali
Package dimensions	115 x 70 x 70 mm
Product dimensions	115 x 70 x 70 mm
Package weight	200 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years

