


TUUB LED SURFACE DOWNLIGHT 90



DIMENSIONS



ENERGY

Lightinova
TUUB 90 2700K

A
B
C
D
E
F
G

10
kWh/1000h

2019/2015



EAN	6150713772757
SKU	TBL.27120361.0074
Energy rating	G
Collection	TUUB LED
Colour	Black
IP rating	IP20
Light source	LED
Power	10 W
Lumen	768 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	76.8 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	115 x 70 x 70 mm
Product dimensions	ø55 x 90 mm
Package weight	290 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years

CE

TUUB LED SURFACE DOWNLIGHT 90



DIMENSIONS

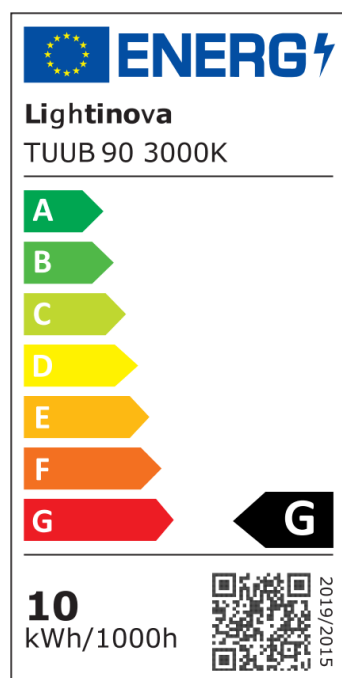



EAN	9506898338580
SKU	TBL.30120361.0073
Energy rating	G
Collection	TUUB LED
Colour	Black
IP rating	IP20
Light source	LED
Power	10 W
Lumen	768 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	76.8 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	115 x 70 x 70 mm
Product dimensions	ø55 x 90 mm
Package weight	280 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



TUUB LED SURFACE DOWNLIGHT 90



DIMENSIONS

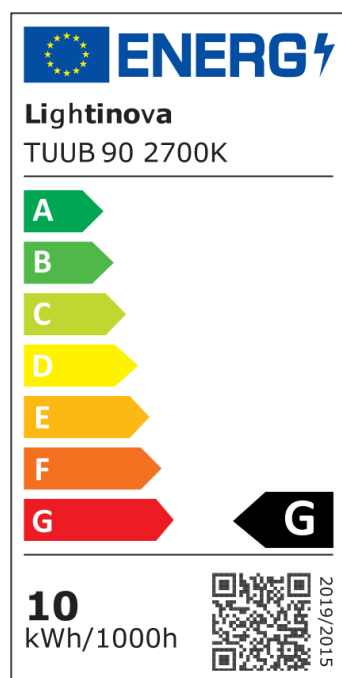



EAN	6150713755781
SKU	TBL.27120361.0066
Energy rating	G
Collection	TUUB LED
Colour	Bronze
IP rating	IP20
Light source	LED
Power	10 W
Lumen	768 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	76.8 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	115 x 70 x 70 mm
Product dimensions	ø55 x 90 mm
Package weight	290 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



TUUB LED SURFACE DOWNLIGHT 90



DIMENSIONS

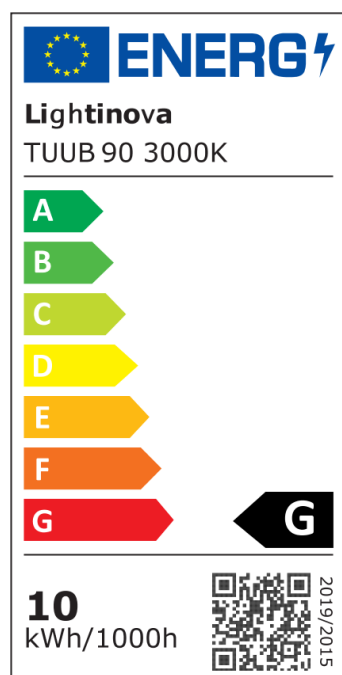



EAN	9509467961172
SKU	TBL.30120361.0065
Energy rating	G
Collection	TUUB LED
Colour	Bronze
IP rating	IP20
Light source	LED
Power	10 W
Lumen	768 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	76.8 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	115 x 70 x 70 mm
Product dimensions	ø55 x 90 mm
Package weight	290 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years

CE

TUUB LED SURFACE DOWNLIGHT 90



DIMENSIONS

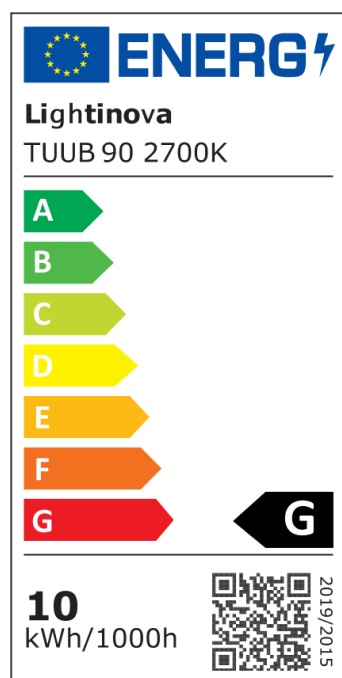



EAN	6150713745799
SKU	TBL.27120361.0062
Energy rating	G
Collection	TUUB LED
Colour	Champagne
IP rating	IP20
Light source	LED
Power	10 W
Lumen	768 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	76.8 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	115 x 70 x 70 mm
Product dimensions	ø55 x 90 mm
Package weight	280 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



TUUB LED SURFACE DOWNLIGHT 90



DIMENSIONS

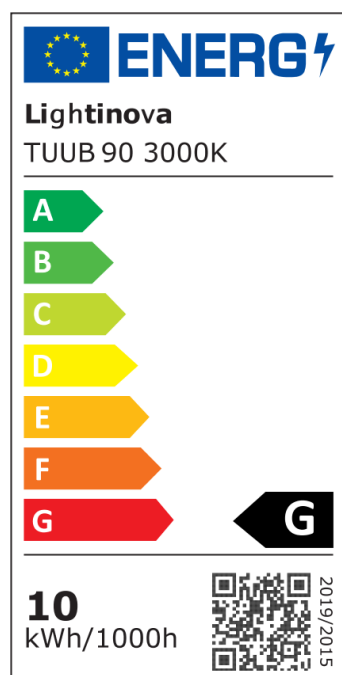



EAN	9504724133484
SKU	TBL.30120361.0061
Energy rating	G
Collection	TUUB LED
Colour	Champagne
IP rating	IP20
Light source	LED
Power	10 W
Lumen	768 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	76.8 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	115 x 70 x 70 mm
Product dimensions	ø55 x 90 mm
Package weight	280 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



TUUB LED SURFACE DOWNLIGHT 90



DIMENSIONS

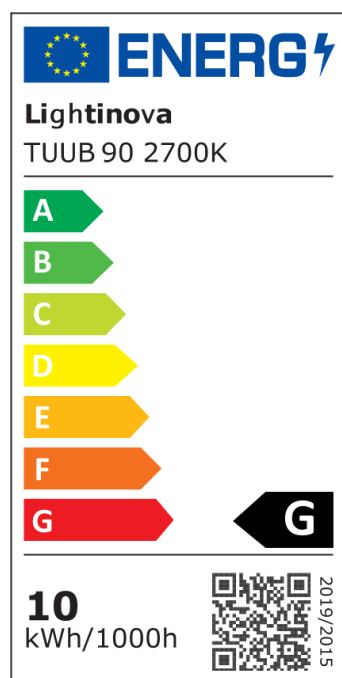



EAN	6150713758744
SKU	TBL.27120361.0070
Energy rating	G
Collection	TUUB LED
Colour	White
IP rating	IP20
Light source	LED
Power	10 W
Lumen	768 Lm
Colour temperature	2700K
Colour Rendering Index	CRI>90
Efficacy	76.8 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	115 x 70 x 70 mm
Product dimensions	ø55 x 90 mm
Package weight	280 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years



TUUB LED SURFACE DOWNLIGHT 90



DIMENSIONS

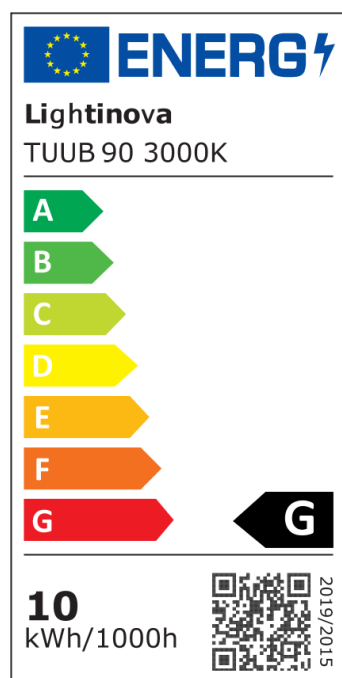

EAN	9509289852382
SKU	TBL.30120361.0069
Energy rating	G
Collection	TUUB LED
Colour	White
IP rating	IP20
Light source	LED
Power	10 W
Lumen	768 Lm
Colour temperature	3000K
Colour Rendering Index	CRI>90
Efficacy	76.8 Lm/W
Lifetime	>50.000h
Beam angle	36 D
Driver	Yes
Voltage	24 V
Input voltage	220-240 V
Dim	Triac
Package dimensions	115 x 70 x 70 mm
Product dimensions	ø55 x 90 mm
Package weight	280 g
HS code	94054990
ETL code	-
Material	Aluminium
Warranty	2 years

