

CLIXX SLIM INSTALLATION MANUAL

P. 2 — 3	SURFACE INSTALLATION
P. 4 — 6	SUSPENDEd INSTALLATION
P. 7 — 9	RECESSED INSTALLATION
P. 10	CONNECTING SURFACE/SUSPENDEd TRACKS
P. 11	CONNECTING RECESSED TRACKS
P. 12	CONNECTING TRACK DRIVER BOX
P. 13	WIRING

CAUTION: READ THE INSTRUCTIONS

The safety of this product can only be guaranteed if the installation instructions are respected and carried out by a qualified professional. Always disconnect the power before installation. Do not make any modifications to the products. Lightinova disclaims any responsibility for modified products.









SELV




IP20




1.1 SURFACE TRACK INSTALLATION

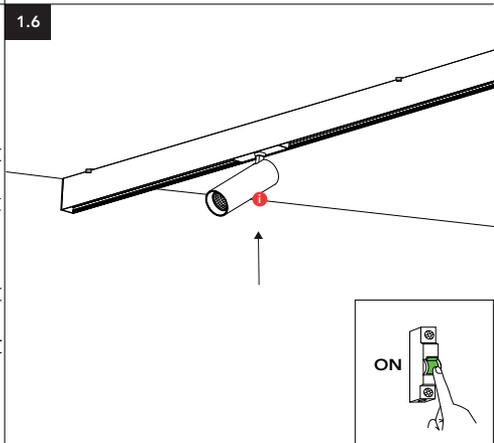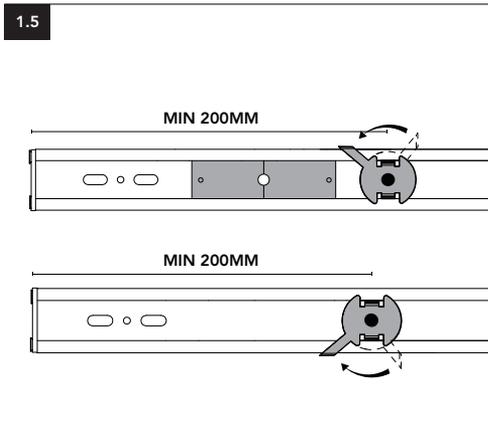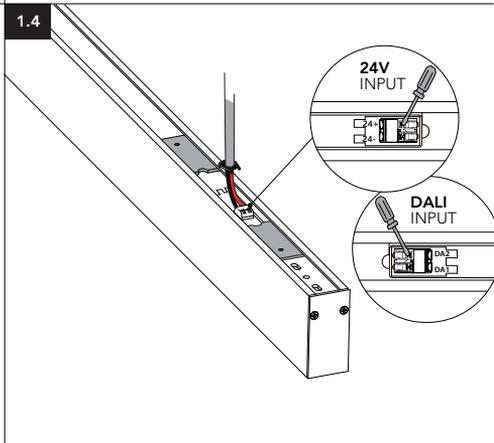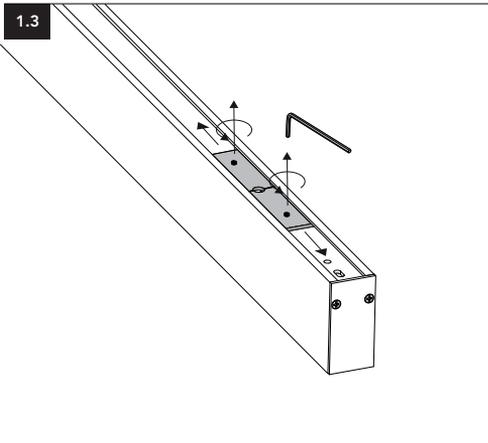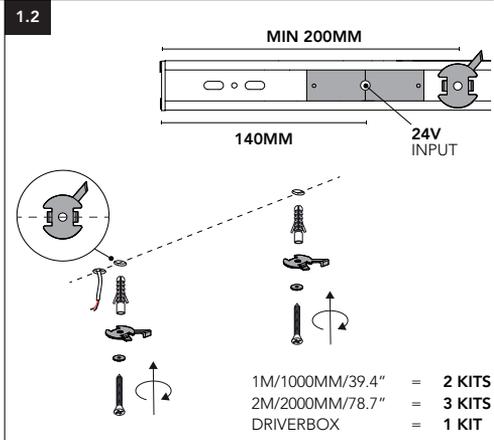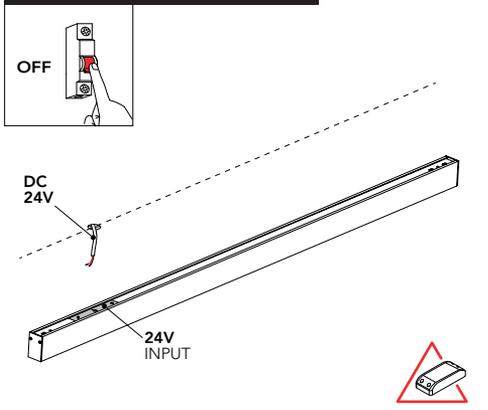

SURFACE INSTALLATION WITH **DRIVER BOX**

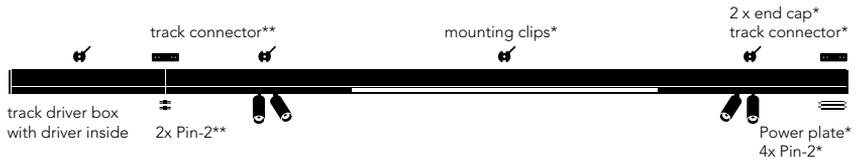

SURFACE INSTALLATION WITH **REMOTE DRIVER**

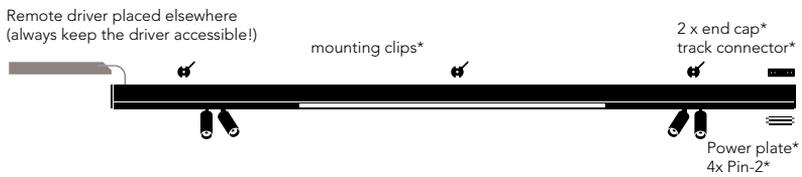

1M/1000MM/39.4" = 2 KITS



2M/2000MM/78.7" = 3 KITS



3M/3000MM/118.1" = 4 KITS




4M/4000MM/157.5" = 5 KITS







Keep mounting clips close to joints




* Included with 1000 mm and 2000 mm surface track
** Included with surface track driver box

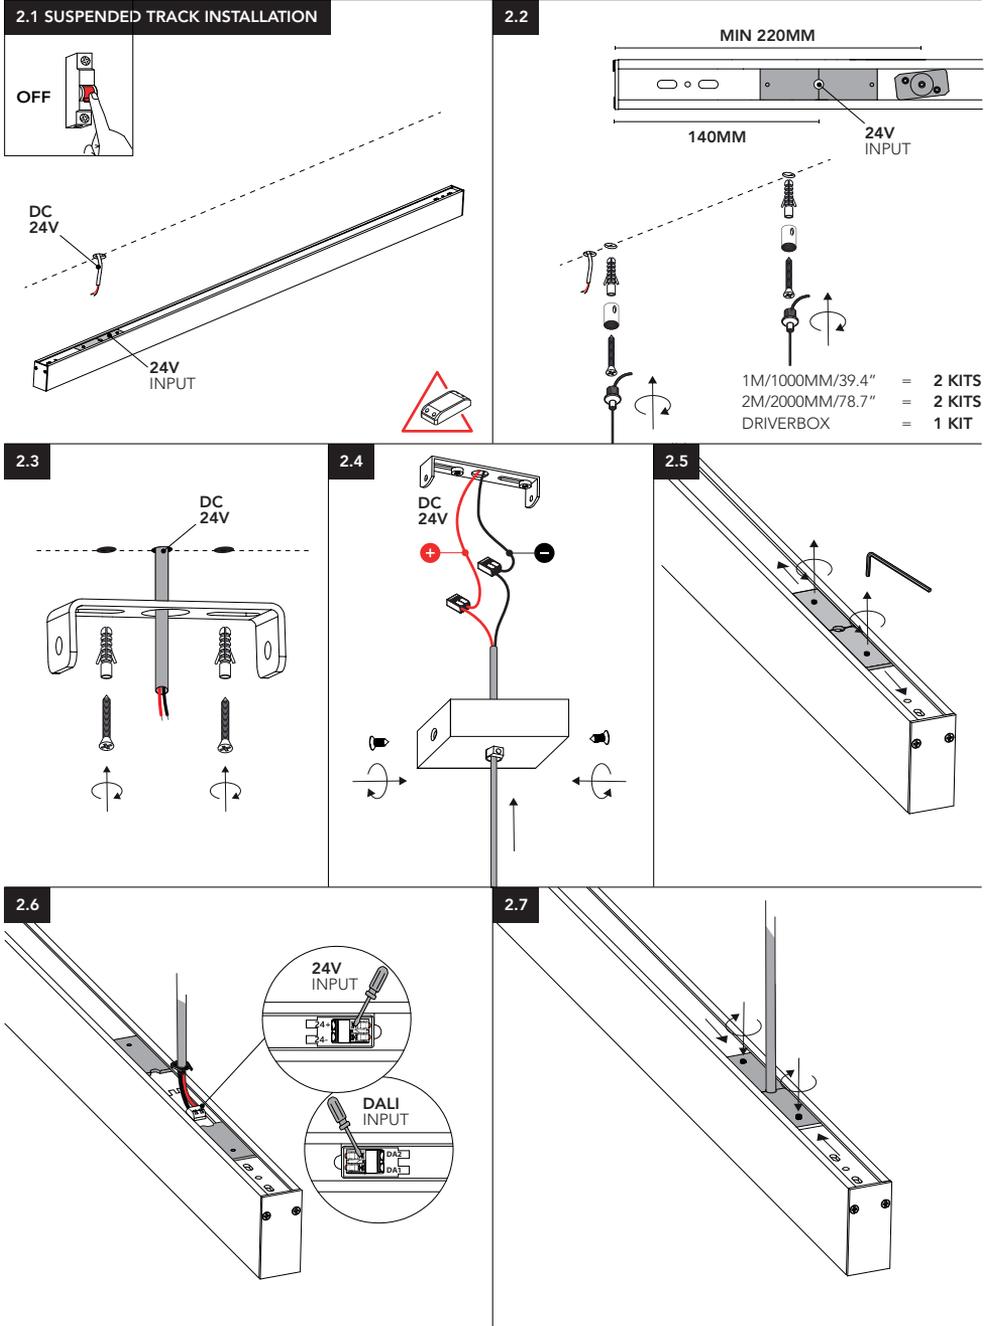

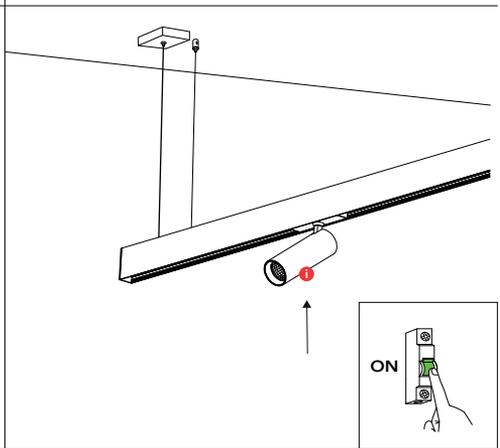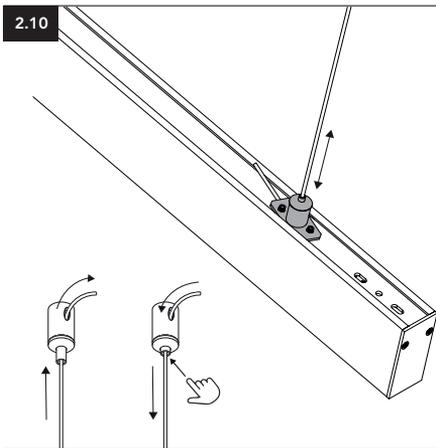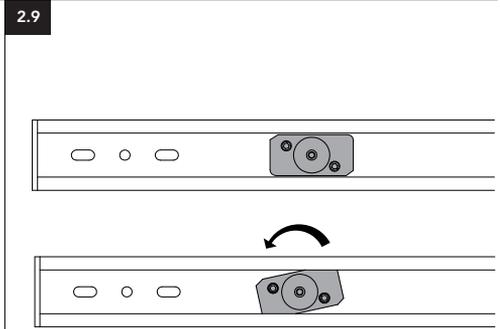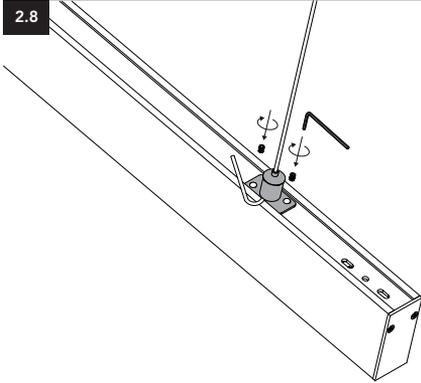


i Make sure total wattage of light modules does **not exceed drivers max capacity.**

SUSPENDED INSTALLATION WITH **DRIVER BOX**

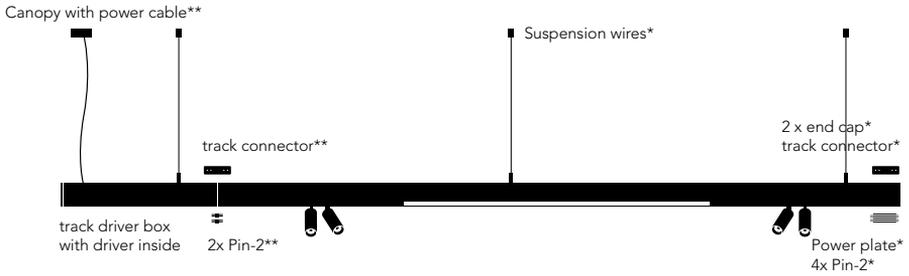

SUSPENDED INSTALLATION WITH **REMOTE DRIVER**

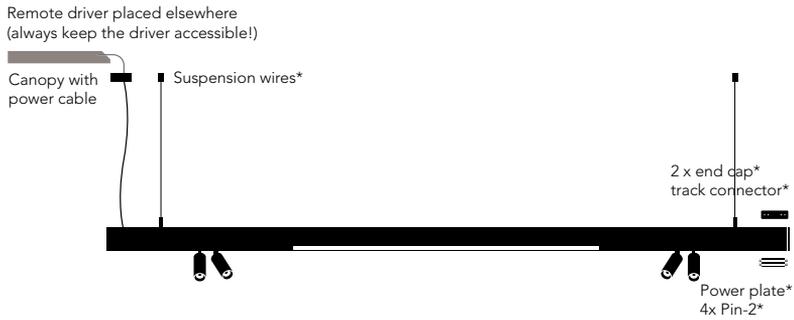

1M/1000MM/39.4" = **2 KITS**



2M/2000MM/78.7" = **2 KITS**




3M/3000MM/118.1" = **3 KITS**




4M/4000MM/157.5" = **3 KITS**




Keep suspension wires close to joints




3.1 TRIMLESS TRACK INSTALLATION

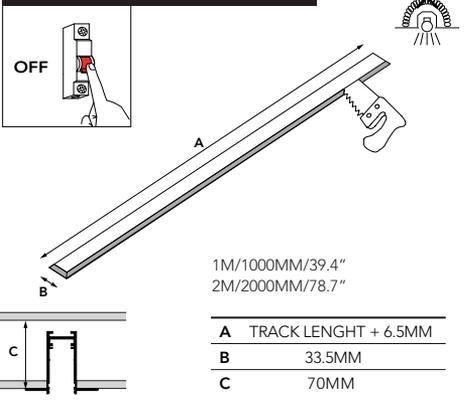


3.2

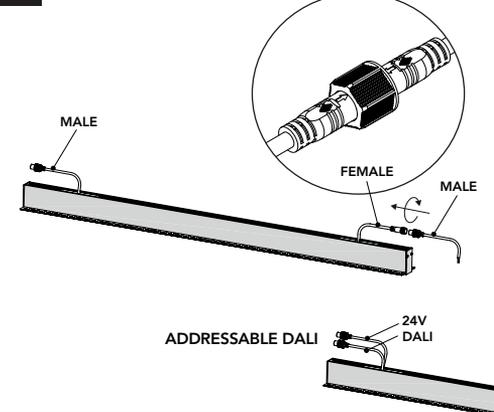

3.3

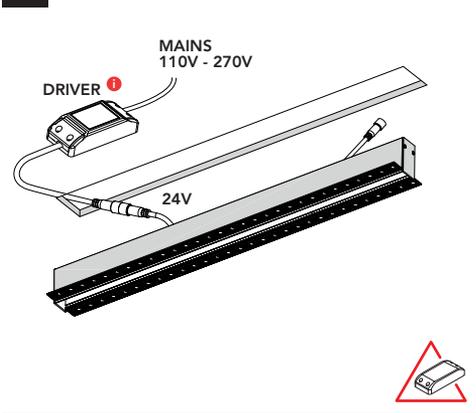


3.4

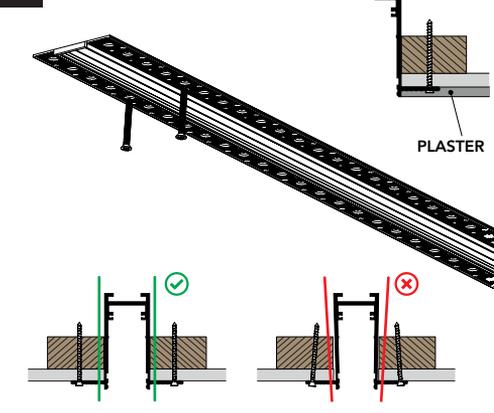


⚠ WARNING: ALWAYS TEST THE SYSTEM BEFORE PROCEEDING TO THE NEXT STEPS.


3.5

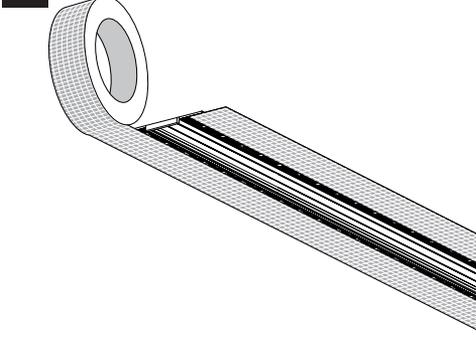

3.6

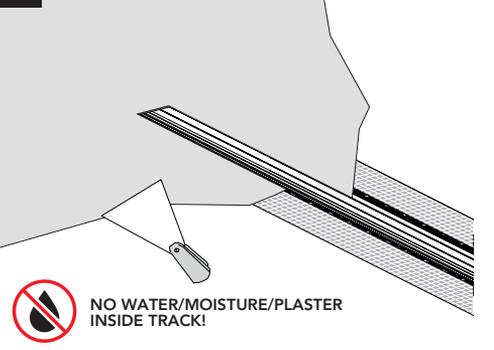

1 Always keep the driver accessible!
Do not place on drop ceiling.

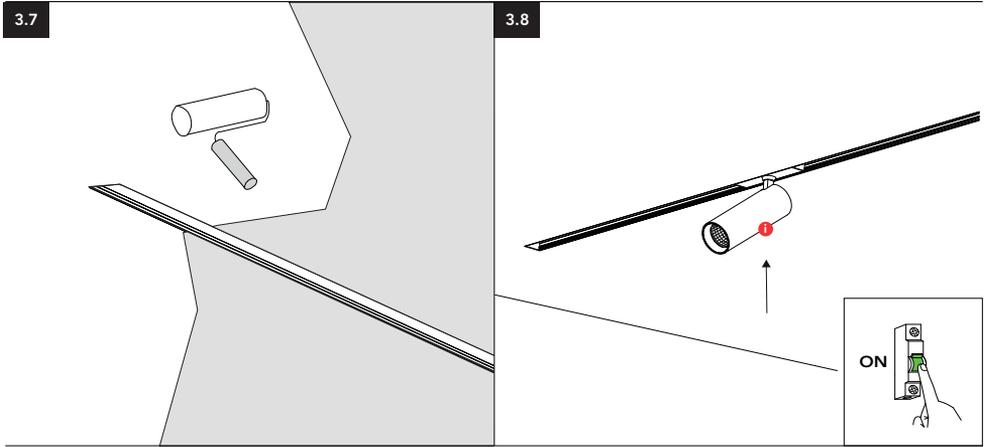


1 Make sure total wattage of light modules does **not exceed drivers max capacity**.

RECESSED INSTALLATION WITH **DRIVER BOX**




RECESSED INSTALLATION WITH **REMOTE DRIVER**

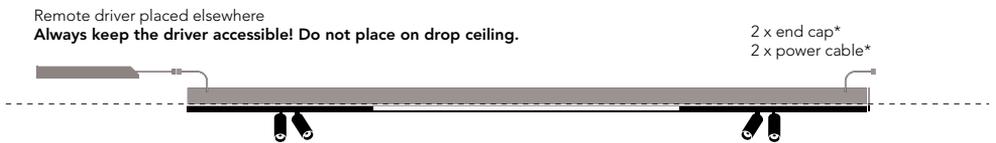


* Included with 1000 mm and 2000 mm trimless track
 ** Included with trimless track driver box


4.1 CONNECTING SURFACE/SUSPENDED TRACKS

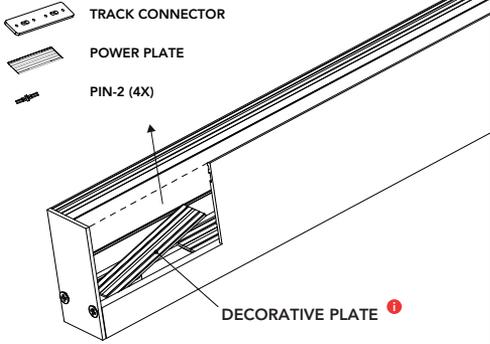


4.2

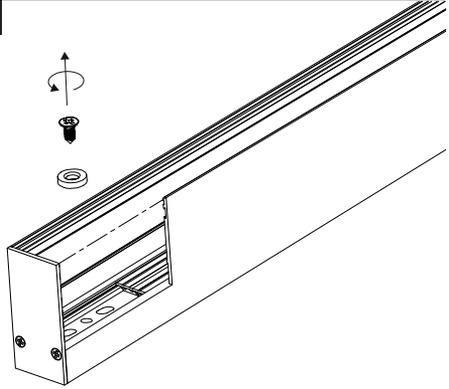


4.3

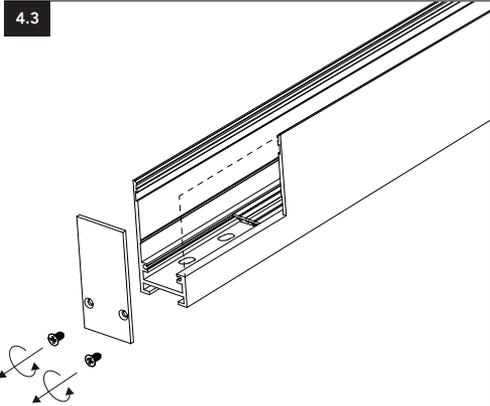


4.4

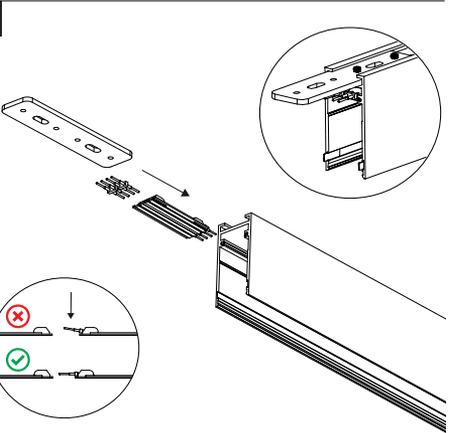

4.5

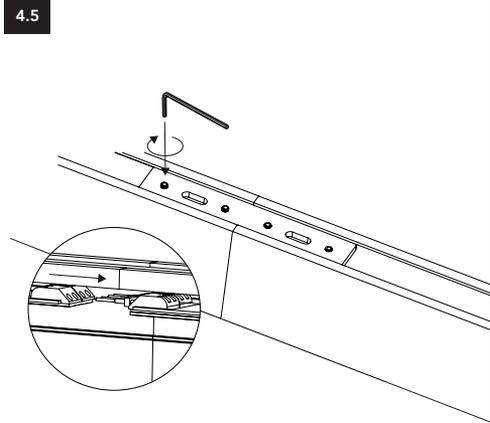


4.6

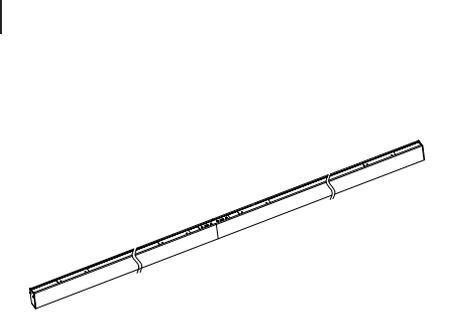


ⁱ Only required when both sides of the track are being connected to other tracks. If only one side is being connected, use the side without the decorative plate.


5.1 CONNECTING RECESSED TRACKS

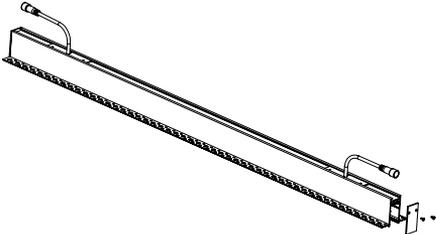


5.2

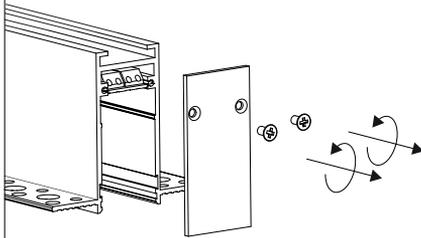


5.3

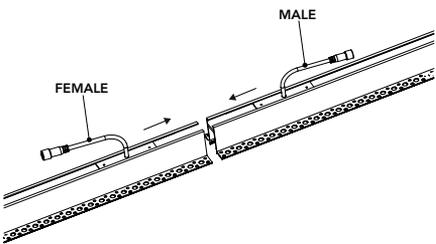


5.4

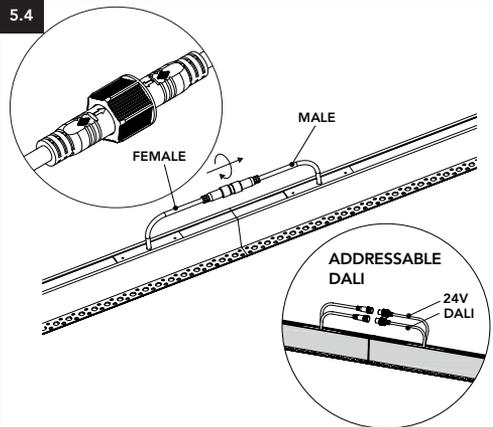


5.5

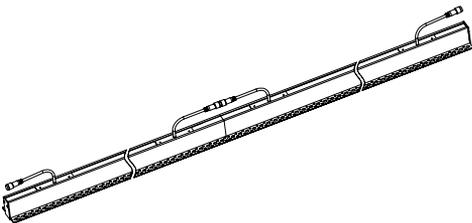

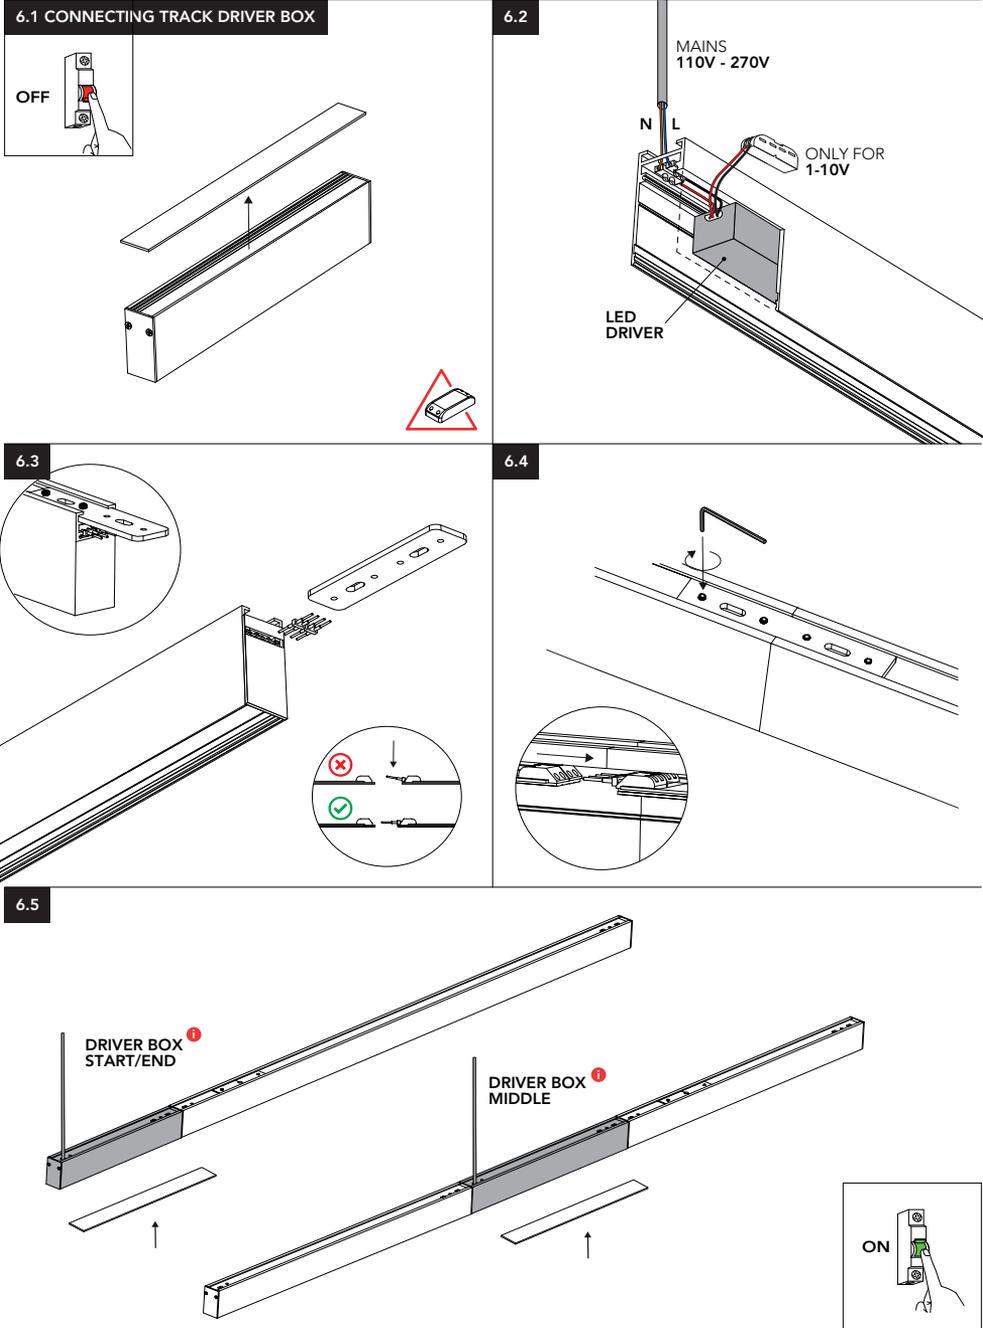


7 WIRING


PHASE-CUT (TRIAC) / ZIGBEE




1-10V

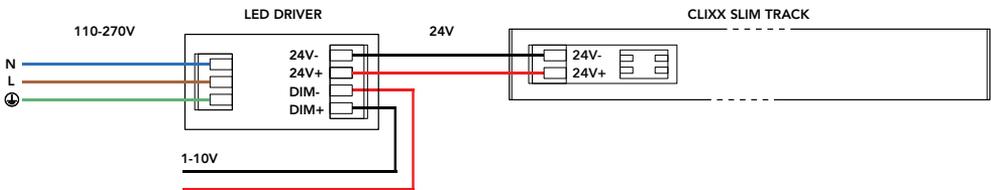

DALI

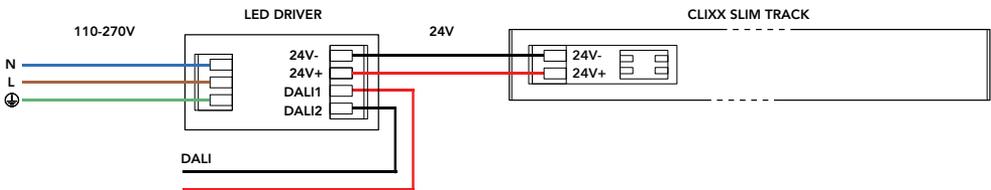

ADDRESSABLE DALI

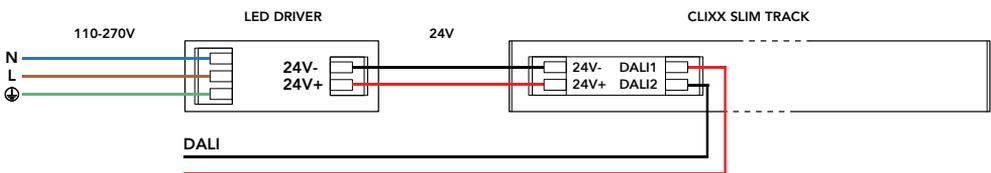

LEGEND

- | | | | |
|---|--|---|---------------------------------|
|  | Complies with European directive | IP | Protection indication |
|  | Complies with Canadian and American directive |  | Proper disposal of this product |
|  | Interior use |  | No insulation on the appliance |
|  | Interior and exterior use |  | Wall mounting |
|  | Exterior use |  | Ceiling mounting |
|  | Class 1 |  | Floor mounting |
|  | Class 2 | SELV | Safety Extra Low Voltage |
|  | Class 3 |  | High Voltage |
|  | Only use the correct driver provided by Lightinova | | |

IMPORTANT

This installation manual provides the official instructions for the correct and safe installation of this product. The product must be installed and commissioned by qualified professionals in accordance with applicable local laws, standards, and the guidance provided herein. Any deviation from the instructions, unauthorized modifications to the product, or improper installation may lead to malfunction, damage, or safety risks. Such actions may void the warranty and limit Lightinova's responsibility.

If any part of the installation process is unclear, contact Lightinova for clarification before proceeding. Do not make assumptions or implement alternative solutions that are not explicitly described in this manual.

Lightinova is not liable for any damage, malfunction, or injury resulting from failure to follow this manual or from unauthorized changes to the product or its installation

Call us +31 (0) 76 369 00 24
Email us support@lightinova.com
Chat www.lightinova.com

LIGHTINOVA

Korhoenweg 17, 4791 RM Klundert
Netherlands

tel. +31 (0) 76 369 00 24
e-mail info@lightinova.com
www.lightinova.com

Lightinova reserves the right to make any necessary aesthetic, technical, constructive or dimensional changes without notice to improve its products. Such cases cannot be claimed by the customer.